






ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com




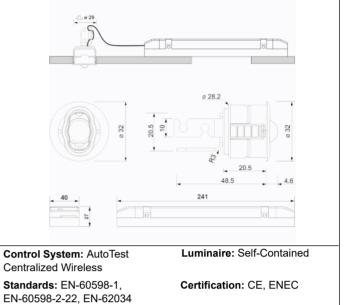

Supply: 230V 50Hz<2.8W	Class: II	
Maintained mode consumption: 2.8 W	Mode: M/NM	
Non-maintained mode consumption: 0.9 W	Power factor: - %	
Working temperature: 0-40°C	Signaling Luminaire: -	
Emergency lamp: 1 x LED 3W	LED temperature: 4000°K	
Emergency lumen output: 250 lm	Duration: 1 h	
Maintained lumen output: 150 lm	Remote control: No	
Battery: 3.2V-1.5Ah LFP	Charging time: 12 h	


# Finish: White RAL9003 Weight: 0,60KG ATEX Envelope:

#### **Photometric curve**

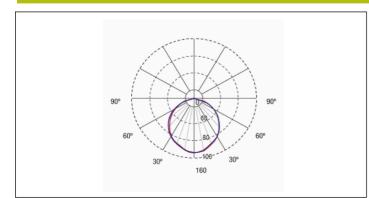

#### Interdistance

Installation height		
2,0 m	8,90 m	8,98 m
2,5 m	9,81 m	9,91 m
3,0 m	10,57 m	10,69 m
3,5 m	11,21 m	11,33 m



## LML9250LDPW



 $\begin{array}{l} \mathsf{ELECTROZEMPER} \quad S.A.\\ \mathsf{Avda} \quad de \quad la \quad \mathsf{Ciencia} \quad \mathsf{s/n}.\\ \mathsf{Parque} \quad \mathsf{Ind} \quad \mathsf{Avaraado}\\ \mathsf{13005} \quad \mathsf{Ciudad} \quad \mathsf{Real}. \quad \mathsf{Spain}.\\ \mathsf{rbl:} \quad \mathsf{r34} \quad \mathsf{902} \quad \mathsf{11} \quad \mathsf{11} \quad \mathsf{97}\\ \mathsf{rax:} \quad \mathsf{r34} \quad \mathsf{902} \quad \mathsf{11} \quad \mathsf{11} \quad \mathsf{97}\\ \mathsf{rax:} \quad \mathsf{r34} \quad \mathsf{902} \quad \mathsf{11} \quad \mathsf{11} \quad \mathsf{97}\\ \mathsf{rax:} \quad \mathsf{r34} \quad \mathsf{902} \quad \mathsf{rax:} \quad \mathsf{r3m} \quad \mathsf{rax:} \quad \mathsf{rax:} \quad \mathsf{r3m} \quad \mathsf{rax:} \quad \mathsf{r3m} \quad \mathsf{rax:} \quad \mathsf{r3m} \quad \mathsf{r3m} \quad \mathsf{rax:} \quad \mathsf{r3m} \quad$ 

### Installation characteristics

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode. Luminaires made up of a spotlight + electrical equipment with batteries (Self-contained luminaires). Possibility of installation in: On suspended ceiling. Recessed ceiling (Slat ceilings) with accessory (included). Continuous rail. **Operating characteristics** The luminaire has status LEDs, which indicates: Status of the battery charging circuit. Battery status (duration) Emergency status function. Test status. Microprocessor controlled luminaire The luminaire can be connected to a control unit. When the luminaire is installed without a control unit, it performs periodic and automatic tests. Functional test every 7 days. Duration test every 365 days. The test result is shown in the status indicator LEDs. Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data