


### Graphic reference



### Dimensions

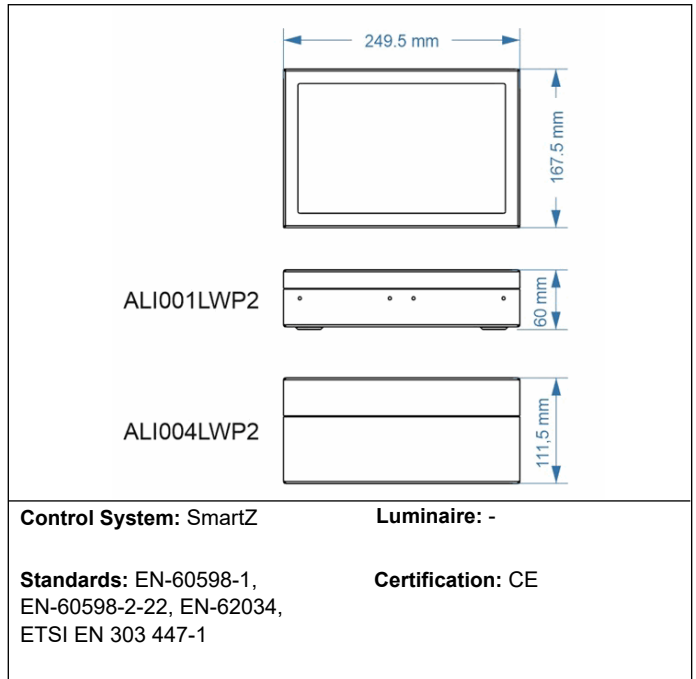

### Electrical characteristics

|   |   |
|---|---|
| <p><b>Supply:</b> 230V 50Hz&lt;4.0W</p> <p><b>Maintained mode consumption:</b> 4 W</p> <p><b>Non-maintained mode consumption:</b> - W</p> <p><b>Working temperature:</b> 0-40°C</p> <p><b>Emergency lamp:</b> SCREEN</p> <p><b>Emergency lumen output:</b> - lm</p> <p><b>Maintained lumen output:</b> - lm</p> <p><b>Battery:</b> 6.4V-3.0Ah LFP</p> | <p><b>Class:</b> I</p> <p><b>Mode:</b> M</p> <p><b>Power factor:</b> - %</p> <p><b>Signaling Luminaire:</b> -</p> <p><b>LED temperature:</b> -</p> <p><b>Duration:</b> 2 h</p> <p><b>Remote control:</b> No</p> <p><b>Charging time:</b> 12 h</p> |
|---|---|

### Mechanical characteristics

|   |   |
|---|---|
| <p><b>Housing:</b> Sheet Iron</p> <p><b>Diffuser:</b> -</p> <p><b>Suitable for flammable surfaces:</b> Yes</p> <p><b>ATEX Envelope:</b></p> | <p><b>IP/IK:</b> IP42/IK01</p> <p><b>Finish:</b> Black RAL9005</p> <p><b>Weight:</b> 2,29KG</p> |
|---|---|

### Photometric curve



### Interdistance

|                            |   |   |
|----------------------------|---|---|
| <b>Installation height</b> |   |   |
| 2,0 m                      | - | - |
| 2,5 m                      | - | - |
| 3,0 m                      | - | - |
| 3,5 m                      | - | - |

### Installation characteristics

Possibility of installation in:

- Wall-mounted
- Ceiling surface
- Wall flag
- Ceiling suspension

Possibility of connection with:

- Surface tube wiring.

Vision distance: 20 m

Available with one screen (ALI001LWP2) or two screens (ALI004LWP2)

### Operating characteristics

The luminaire has status LEDs, which indicates:

- Status of the battery charging circuit.
- Battery status (duration)
- Emergency status function.
- Test status.

SmartZ wireless communication.

The luminaire can be connected to a control unit.

The test result is shown in the status indicator LEDs.

Wireless communication that allows:

- Communication with Control unit by wireless communication

Alioth adaptive luminaires that are suitable to define the safest evacuation route.

### General Envelope data

### Accessories

#### BZT315

ACC. BANDE. SUP. ALIOTH 10.1"  
PARED/TECHO NEGRO \*