


Graphic reference



Dimensions

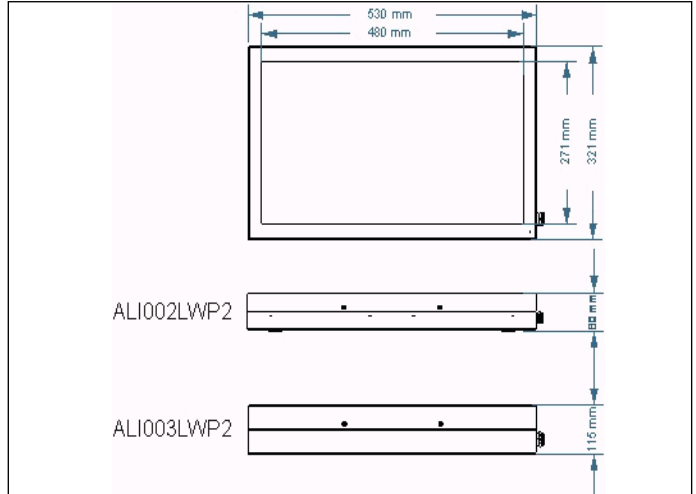

Control System: SmartZ

Luminaire: -

Standards: EN-60598-1,
EN-60598-2-22, EN-62034,
ETSI EN 303 447-1

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<27.0W

Maintained mode consumption: 27 W

Non-maintained mode consumption: - W

Working temperature: 0-40°C

Emergency lamp: SCREEN

Emergency lumen output: - lm

Maintained lumen output: - lm

Battery: 2x(12.8V-3.0Ah LFP)

Class: I

Mode: M

Power factor: - %

Signaling Luminaire: -

LED temperature: -

Duration: 2 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Housing: Sheet Iron

Diffuser: -

Suitable for flammable surfaces: Yes

ATEX Envelope:

IP/IK: IP42/IK01

Finish: Black RAL9005

Weight: 7,35KG

Photometric curve



Interdistance

Installation height



2,0 m

-

-

2,5 m

-

-

3,0 m

-

-

3,5 m

-

-

Installation characteristics

Possibility of installation in:

- Wall-mounted
- Ceiling surface
- Wall flag
- Ceiling suspension

Possibility of connection with:

- Surface tube wiring.

Vision distance: 40 m

Available with one screen (ALI002LWP2), two screens (ALI003LWP2), one pictogram (ALI005LWP) or with two pictograms (ALI006LWP)

Operating characteristics

The luminaire has status LEDs, which indicates:

- Status of the battery charging circuit.
- Battery status (duration)
- Emergency status function.
- Test status.

SmartZ wireless communication.

The luminaire can be connected to a control unit.

The test result is shown in the status indicator LEDs.

Wireless communication that allows:

- Communication with Control unit by wireless communication

Alioth adaptive luminaires that are suitable to define the safest evacuation route.

General Envelope data

Accessories

BZT320

ACC. BANDE. SUP. ALIOTH 21.5"
PARED/TECHO NEGRO *