

Datasheet SPAZIO MINI

LMR9201LDP2W




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ ze m p e r . c o m
w w w w . z e m p e r . c o m

Graphic reference



Dimensions



Control System: AutoTest Centralized Wireless

Standards: EN-60598-1, EN-60598-2-22, EN-62034

Luminaire: Self-Contained

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<2.5W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2.5~W\\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W\\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 200 lm Maintained lumen output: 120 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: M/NM Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 2 h **Remote control:** No **Charging time:** 12 h

Mechanical characteristics

Envelope: Polycarbonate **Diffuser**: Escape Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,49KG

ATEX Envelope:

Photometric curve

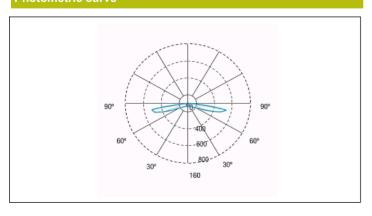

Interdistance

| Installation height | | |
|------------------------|--------|---------|
| 2,0 m | 6,88 m | 23,12 m |
| 2,5 m | 7,32 m | 24,76 m |
| 3,0 m | 7,59 m | 25,85 m |
| 3,5 m | 7,73 m | 26,54 m |



LMR9201LDP2W



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Installation characteristics

SPAZIO MINI

| Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode. |
|---|
| Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires). |
| Possibility of installation in: |

On suspended ceiling.

On continuous-luminaires.

Fixing by pressure.

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

| General Envelope data | | |
|-----------------------|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |