

# LUZ4400LCP




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com



SPAZIO LUZ



### Dimensions

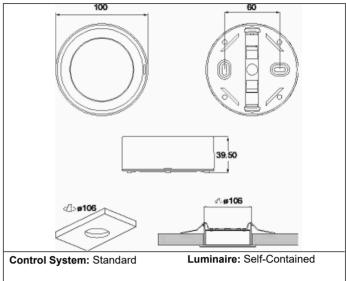

Standards: EN-60598-1,

EN-60598-2-22

Certification: CE, ENEC



### **Flectrical characteristics**

Supply: 230V 50Hz<3.8W

 $\begin{tabular}{ll} \textbf{Maintained mode consumption: } 3,8~W \\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0,9~W \\ \end{tabular}$ 

Working temperature: 0-40°C Emergency lamp: 12xLED 0.5W Emergency lumen output: 425 lm Maintained lumen output: 250 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: Non-maintained / Maintained via third terminal

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h Remote control: No Charging time: 12 h

## **Mechanical characteristics**

Housing: Polycarbonate

**Diffuser:** Transparent Polycarbonate **Suitable for flammable surfaces:** Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,19KG

## ATEX Envelope:

## Photometric curve

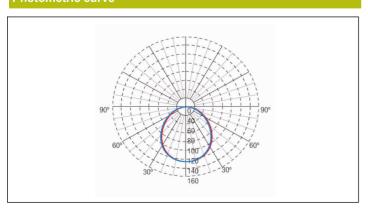

# Interdistance

Installation height		
2,0 m	9,80 m	9,78 m
2,5 m	10,98 m	10,96 m
3,0 m	11,92 m	11,91 m
3,5 m	12,74 m	12,73 m



# LUZ4400LCP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Installation characteristics

Non-maintained luminaires use 4 t	erminals (2	2xL + 2xN)	for supply	connection.
-----------------------------------	-------------	------------	------------	-------------

Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

perati			

The luminaire has a status LED, which indicates:
 Status of the battery charging circuit.
 Green on = Battery charge OK.
 Off = Wrong battery charge.

The luminaire has a built-in button, which allows:
 Simulation test of supply failure.

General Envelope data



# LUZ4400LCP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Accessories

SPAZIO LUZ

















