

LYA5400LXP




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference

ALYA MAXI



Dimensions

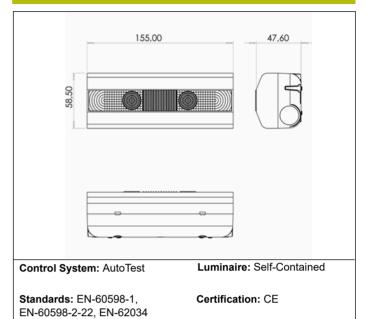

Flectrical characteristics

Supply: 230V 50Hz<3.8W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 3.8~W \\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W \\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 6xLED 0.5W Emergency lumen output: 390 lm Maintained lumen output: 230 lm

Battery: 3.2V-1.5Ah LFP

Class: || Mode: -

Power factor: - %

Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Ambient + Directional Lens
Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,29KG

Photometric curve

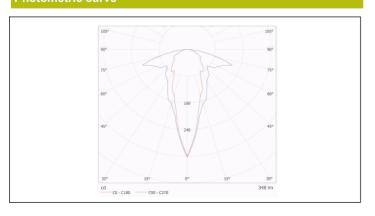

Interdistance

Installation height		
2,0 m	7,58 m	11,87 m
2,5 m	9,48 m	14,84 m
3,0 m	11,36 m	17,81 m
3,5 m	12,20 m	18,88 m



LYA5400LXP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).

Luminaires have a selector bridge to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

General Envelope data

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			
ı			