

LYE5120LAP




ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

EXITALYA MAXI with Downlight

Graphic reference

Datasheet



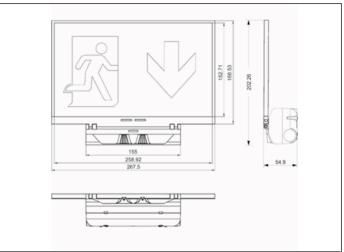

Control System: DALI2 Luminaire: Self-Contained

Standards: EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN

Certification: CE, ENEC,

DALI2



Supply: 230V 50Hz<3.3W

Maintained mode consumption: 3,3 W Non-maintained mode consumption: 2,5 W

Working temperature: 0-40°C Emergency lamp: 25xLED 0.5W Emergency lumen output: 120 lm Maintained lumen output: 70 lm

Battery: 3.2V-1.5Ah LFP

Class: II Mode: -

Power factor: - % Signaling Luminaire: -LED temperature: 6500°K

Duration: 1 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate Diffuser: Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: Black RAL9005

Weight: 0,45KG

ATEX Envelope:

Photometric curve

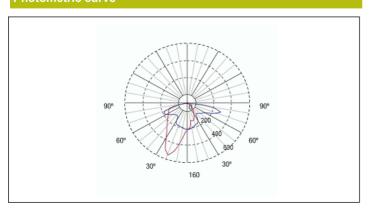

Interdistance

Installation height		
2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m



LYE5120LAP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

EXITALYA MAXI with Downlight

Inet	ıllat	ion c	haract	OFIC	100

Datasheet

Maintained luminaires use 4 terminals (2xL + 2xN)	laintained lur	ninaires us	e 4 termina	als (2xL	+ 2xN)
---	----------------	-------------	-------------	----------	--------

Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).

Installation with mounting plate.

Possibility of installation in:

Wall surface.

Possibility of connection with:

Surface tube wiring.

Vision distance: 25 m

Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data	