


Graphic reference



Dimensions

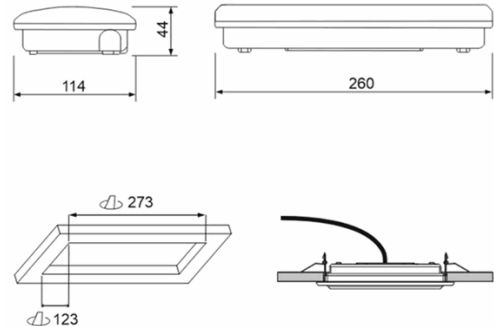

Control System: Standard

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<1.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 1,2 W

Working temperature: 0-40°C

Emergency lamp: 4 x LED 0.5W

Emergency lumen output: 225 lm

Maintained lumen output: - lm

Battery: 3.6V-0.8Ah Ni-Cd

Class: II

Mode: NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transfresnel Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP44/IK07

Finish: White RAL9003

Weight: 0,38KG

Photometric curve

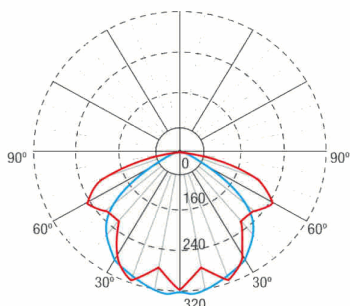

Interdistance

**Installation
height**

| | | |
|-------|---------|--------|
| 2,0 m | 10,38 m | 7,36 m |
| 2,5 m | 11,28 m | 8,32 m |
| 3,0 m | 11,98 m | 9,22 m |
| 3,5 m | 12,52 m | 9,98 m |

Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

- Ceiling/Wall surface.

- Recessed in ceiling.

- Semi-recessed in wall.

Possibility of connection with:

- Recessed wiring.

- Surface tube wiring (max. M20)

Operating characteristics

The luminaire has a status LED, which indicates:

- Status of the battery charging circuit.

 - Green on = Battery charge OK.

 - Off = Wrong battery charge.

Remote control input that allows:

- Put on standby without power supply.

- Restart in emergency status without power supply.

- Emergency status test with power supply

General Envelope data

Accessories

AMD0051



ACC. REC. DIANA FLAT WHITE
CEILING

90091NMF



ACC. PANEL REC. DIANA FLAT WHITE
CEILING

APE0065



ACC. HOUSING IP66 DIANA FLAT
WHITE

APE144



ACC. HOUSING IP44 DIANA FLAT
WHITE

AED0071



ACC. SEMI-REC. DIANA FLAT WHITE
WALL

AMU8001



ACC. FRAME REC. DIANA/XENA
WHITE UNIVERSAL

AIF001



ACC. SLOPE 47° FLAT WHITE

AKF001



ACC. PROT. IK10 FLAT WHITE

AGV120



ACC. PROTEC. GRILLE FLAT/VENUS