


LDF3800C



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel: +34 902 11 11 97 Fax: +34 902 11 11 97 info@zemper.com



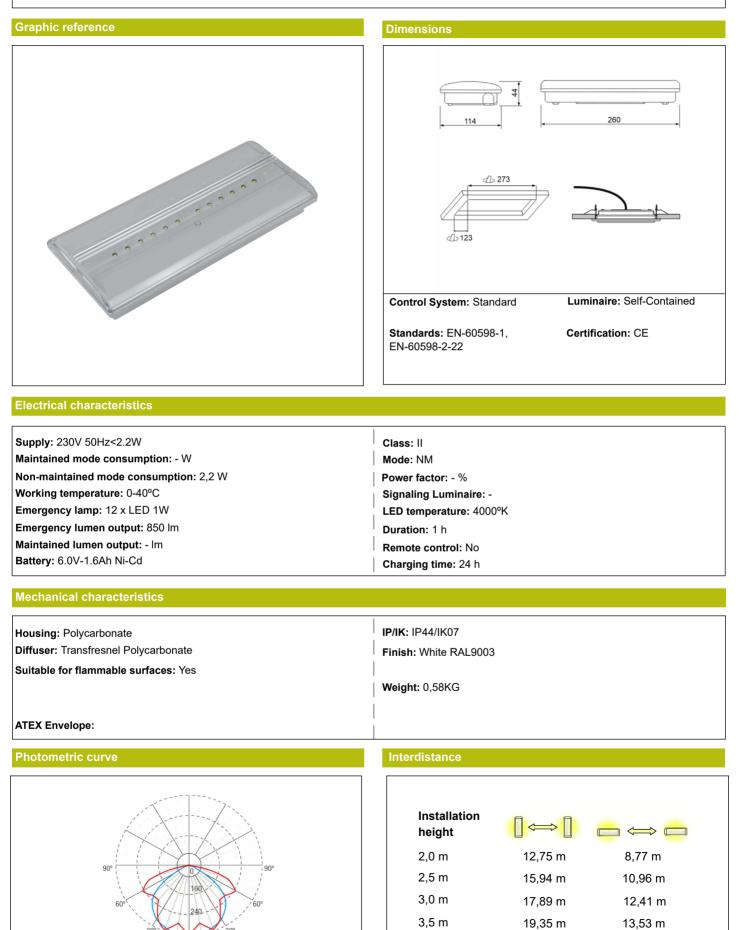

LDF3800C



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode. Installation with mounting plate. Possibility of installation in: Ceiling/Wall surface. Reccessed in ceiling. Semi-reccessed in wall. Possibility of connection with: Recessed wiring. Surface tube wiring (max. M20)

Operating characteristics

The luminaire has a status LED, which indicates: Status of the battery charging circuit. Green on = Battery charge OK. Off = Wrong battery charge. Remote control input that allows: Put on standby without power supply. Restart in emergency status without power supply. Emergency statust test with power supply

General Envelope data



LDF3800C



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

