

LDS9600LAP3




ELECTROZEMPER S.A. ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference

Datasheet DIANA 8



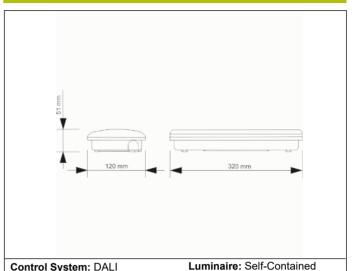

Control System: DALI

Standards: EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN Certification: CE, CIVIL

DEFENSE



Supply: 230V 50Hz<7.5W

Maintained mode consumption: 7.5 W Non-maintained mode consumption: 2.0 W

Working temperature: 0-40°C Emergency lamp: 12 x LED 0.5W Emergency lumen output: 600 lm Maintained lumen output: 360 lm Battery: 6.4V-3.0Ah LFP

Mode: M/NM

62386

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 3 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Envelope: Polycarbonate


Diffuser: Transfresnel Polycarbonate Suitable for flammable surfaces: Yes IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 1,00KG

ATEX Envelope:

Photometric curve

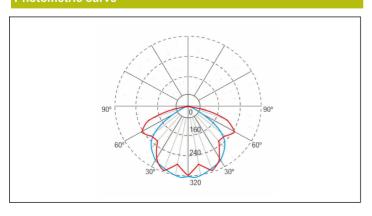

Interdistance

Installation height		
2,0 m	-	-
2,5 m	-	-
3,0 m	-	-
3,5 m	-	-



DIANA 8

LDS9600LAP3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com
www.zemper.com

Installation characteristics
Maintained luminaires have a selector bridge to enable / disable the maintained mode. Installation with mounting plate. Possibility of installation in: Ceiling/Wall surface. Possibility of connection with: Recessed wiring. Surface tube wiring (max. M20)
Operating characteristics
Bus available for DALI communication. The luminaire has a status LED, which indicates: Green LED: OK Yellow LED flashing: Battery charging or battery connection failure. LED off: Emergency operation failure or mains failure or defective LED or defective unit.
General Envelope data