


### Graphic reference



### Dimensions

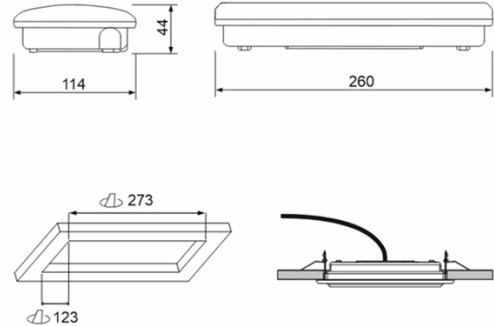

**Control System:** DALI2

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034,  
EN-62386

**Certification:** CE, DALI2



### Electrical characteristics

**Supply:** 230V 50Hz<3.8W

**Maintained mode consumption:** 3,8 W

**Non-maintained mode consumption:** 0,9 W

**Working temperature:** 0-40°C

**Emergency lamp:** 12 x LED 0.5W

**Emergency lumen output:** 390 lm

**Maintained lumen output:** 235 lm

**Battery:** 3.2V-1.5Ah LFP

**Class:** II

**Mode:** Non-maintained / Maintained via switch-link

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 1 h

**Remote control:** No

**Charging time:** 12 h

### Mechanical characteristics

**Housing:** Polycarbonate

**Diffuser:** Transfresnel Polycarbonate

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP44/IK07

**Finish:** White RAL9003

**Weight:** 0,43KG

### Photometric curve

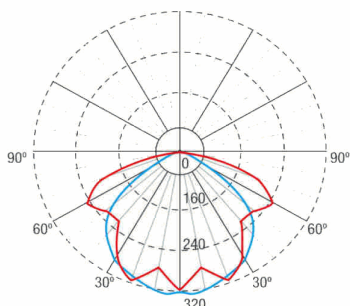

### Interdistance

**Installation  
height**



2,0 m	12,02 m	8,33 m
2,5 m	13,39 m	9,43 m
3,0 m	14,36 m	10,38 m
3,5 m	15,19 m	11,35 m

### Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

- Ceiling/Wall surface.

- Recessed in ceiling.

- Semi-recessed in wall.

Possibility of connection with:

- Recessed wiring.

- Surface tube wiring (max. M20)

### Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

- Green LED: OK

- Yellow LED flashing: Battery charging or battery connection failure.

- LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data

### Accessories

#### AMD0051



ACC. REC. DIANA FLAT WHITE

#### 90091NMF



ACC. PANEL REC. DIANA FLAT WHITE

#### APE0065



ACC. HOUSING IP66 DIANA FLAT WHITE

#### APE144



ACC. HOUSING IP44 DIANA FLAT WHITE

#### AED0071



ACC. SEMI-REC. DIANA FLAT WHITE

#### AMU8001



ACC. FRAME REC. DIANA/XENA UNIVERSAL - WHITE

#### AIF001



ACC. SLOPE 47° FLAT WHITE

#### AKF001



ACC. PROT. IK10 FLAT WHITE

#### AGV120



ACC. PROT. GRILLE FLAT/VENUS