

Datasheet SPAZIO NANO

LML9200LDP2W




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference



Dimensions

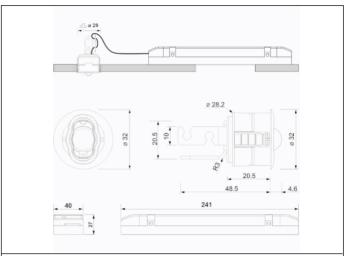

Control System: AutoTest Centralized Wireless

Standards: EN-60598-1, EN-60598-2-22, EN-62034

Luminaire: Self-Contained

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<2.5W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2.5~W\\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W\\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 200 lm Maintained lumen output: 120 lm

Battery: 3.2V-1.5Ah LFP

Mode: M/NM
Power factor: - %

Signaling Luminaire: -LED temperature: 4000°K

Duration: 2 h **Remote control:** No **Charging time:** 12 h

Mechanical characteristics

Envelope: Polycarbonate **Diffuser:** Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 1,00KG

ATEX Envelope:

Photometric curve

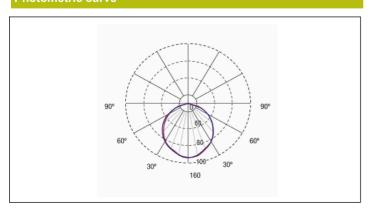

Interdistance

Installation height		
2,0 m	8,35 m	8,44 m
2,5 m	9,19 m	9,29 m
3,0 m	9,87 m	9,98 m
3,5 m	10,42 m	10,54 m



LML9200LDP2W



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Installation characteristics

SPAZIO NANO

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode
Luminaires made up of a spotlight + electrical equipment with batteries (Self-contained luminaires).
Possibility of installation in:

On suspended ceiling.

Recessed ceiling (Slat ceilings) with accessory (included).

Continuous rail.

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data				