

## Datasheet SPAZIO MINI

## LMR9250LDPW




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

#### Graphic reference



#### Dimensions

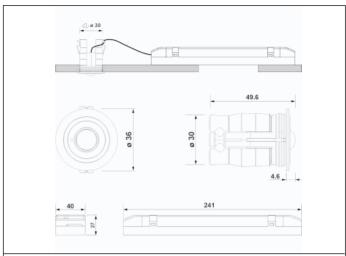

Control System: AutoTest Centralized Wireless

**Standards:** EN-60598-1, EN-60598-2-22, EN-62034

Luminaire: Self-Contained

Certification: CE, ENEC



#### **Flectrical characteristics**

Supply: 230V 50Hz<2.8W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2.8~W\\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W\\ \end{tabular}$ 

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 250 lm Maintained lumen output: 150 lm

Battery: 3.2V-1.5Ah LFP

Mode: M/NM

Power factor: - %
Signaling Luminaire: LED temperature: 4000°K

Duration: 1 h Remote control: No Charging time: 12 h

#### **Mechanical characteristics**

**Envelope:** Polycarbonate **Diffuser:** Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,21KG

#### ATEX Envelope:

### Photometric curve

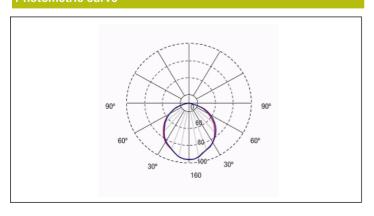

### Interdistance

Installation height		
2,0 m	8,90 m	9,03 m
2,5 m	9,79 m	9,94 m
3,0 m	10,53 m	10,70 m
3,5 m	11,17 m	11,32 m



# LMR9250LDPW



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

#### Installation characteristics

SPAZIO MINI

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode
Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires).
Possibility of installation in:

On suspended ceiling.

On continuous-luminaires.

Fixing by pressure.

#### **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data						