

# **Datasheet** SPAZIO MINI


# LMR9251LXP



ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

#### Graphic reference



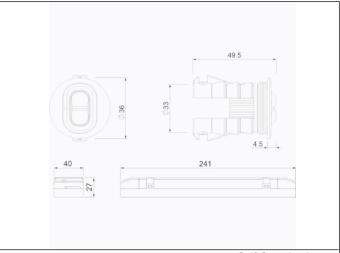

Luminaire: Self-Contained Control System: AutoTest

Standards: EN-60598-1,

Certification: CE EN-60598-2-22, EN-62034

Supply: 230V 50Hz<2.8W

Maintained mode consumption: 2.8 W Non-maintained mode consumption: 0.9 W

Working temperature: 0-40°C Emergency lamp: 1XLEDS 3W Emergency lumen output: 250 lm Maintained lumen output: 150 lm

Battery: 3.2V-1.5Ah LFP

Mode: M/NM Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h Remote control: Yes Charging time: 12 h

## **Mechanical characteristics**

Envelope: Polycarbonate Diffuser: Escape Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,48KG

### ATEX Envelope:

### **Photometric curve**

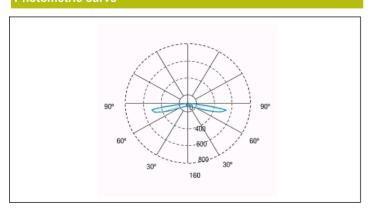

## Interdistance

Installation height		
2,0 m	7,43 m	24,35 m
2,5 m	7,95 m	26,92 m
3,0 m	8,32 m	28,16 m
3,5 m	8,55 m	29,17 m



# LMR9251LXP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

#### Installation characteristics

SPAZIO MINI

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode
Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires).
Possibility of installation in:

On suspended ceiling.

On continuous-luminaires.

Fixing by pressure.

#### **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

General Envelope data	