

# LNC9300LXP3




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

### **Graphic reference**

**NEPTUNO** 



### Dimensions

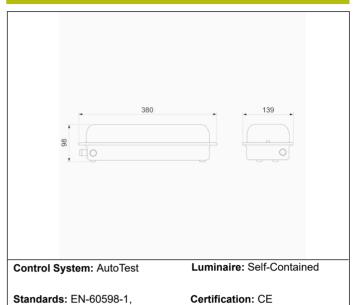

Standards. EN-00090-1, Ce

EN-60598-2-22, EN-62034

### Electrical characteristics

**Supply:** 230V 50Hz<55mA

Maintained mode consumption: 5 W
Non-maintained mode consumption: 2.7 W
Working temperature: -30°C - +25°C
Emergency lamp: 12 x LED 0.5W
Emergency lumen output: 300 lm

Battery: 3.2V-3.0Ah LFP

Maintained lumen output: 180 lm

Class: II

Mode: M/NM Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

**Duration:** 3 h **Remote control:** Yes **Charging time:** 24 h

## **Mechanical characteristics**

Housing: INOX

Diffuser: Matted Polycarbonate

Suitable for flammable surfaces: Yes


IP/IK: IP67/IK07

Finish: -

Weight: 1,00KG

ATEX Envelope:

# Photometric curve

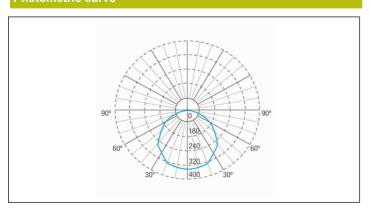

# Interdistance

Installation height		
2,0 m	9,29 m	9,29 m
2,5 m	10,23 m	10,23 m
3,0 m	11,02 m	11,02 m
3,5 m	11,68 m	11,68 m



# LNC9300LXP3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

### Installation characteristics

**NEPTUNO** 

Possibility of installation in:				
Ceiling/Wall surface.				
Possibility of connection with:  Surface tube wiring.				
It has 2 entries for PG-11 cable glands. It is supplied by default with a metallic cable gland placed and with a plug.				

## **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Maintained luminaires use 3 terminals to enable / disable the maintained mode.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

General Envelope data	



# **LNC9300LXP3**



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Accessories



