


### Graphic reference



### Dimensions

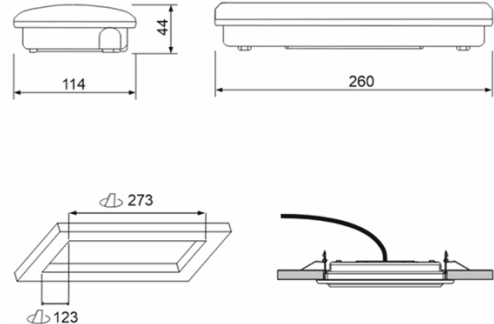

**Control System:** DALI2

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034, EN  
61347-2-7, EN 61347-2-13, EN  
62386

**Certification:** CE, DALI2



### Electrical characteristics

**Supply:** 230V 50Hz<2.0W  
**Maintained mode consumption:** - W  
**Non-maintained mode consumption:** 2,0 W  
**Working temperature:** 0-40°C  
**Emergency lamp:** 12 x LED 1W  
**Emergency lumen output:** 700 lm  
**Maintained lumen output:** - lm  
**Battery:** 6.4V-1.5Ah LFP

**Class:** II  
**Mode:** NM  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 1 h  
**Remote control:** Yes  
**Charging time:** 12 h


### Mechanical characteristics

**Housing:** -  
**Diffuser:** Transfresnel Polycarbonate  
**Suitable for flammable surfaces:** Yes

**ATEX Envelope:**

**IP/IK:** IP44/IK07  
**Finish:** White RAL9003  
**Weight:** 0,58KG

### Photometric curve

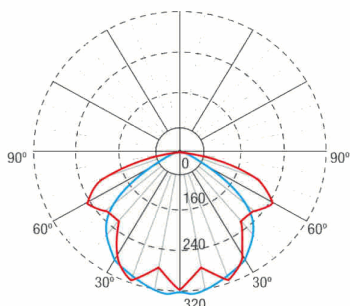

### Interdistance

**Installation  
height**



2,0 m	12,75 m	8,77 m
2,5 m	15,94 m	10,96 m
3,0 m	17,63 m	12,25 m
3,5 m	19,02 m	13,35 m

### Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

- Ceiling/Wall surface.

- Recessed in ceiling.

- Semi-recessed in wall.

Possibility of connection with:

- Recessed wiring.

- Surface tube wiring (max. M20)

### Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

- Green LED: OK

- Yellow LED flashing: Battery charging or battery connection failure.

- LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data

### Accessories

#### AMD0051



ACC. REC. DIANA FLAT WHITE  
CEILING

#### 90091NMF



ACC. PANEL REC. DIANA FLAT WHITE  
CEILING

#### APE0065



ACC. HOUSING IP66 DIANA FLAT  
WHITE

#### APE144



ACC. HOUSING IP44 DIANA FLAT  
WHITE

#### AED0071



ACC. SEMI-REC. DIANA FLAT WHITE  
WALL

#### AMU8001



ACC. FRAME REC. DIANA/XENA  
WHITE UNIVERSAL

#### AIF001



ACC. SLOPE 47° FLAT WHITE

#### AKF001



ACC. PROT. IK10 FLAT WHITE

#### AGV120



ACC. PROTEC. GRILLE FLAT/VENUS