

# **LSM3170LAP3**




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ ze m p e r . c o m
w w w w . z e m p e r . c o m

### Graphic reference

SPAZIO ON



### Dimensions



Control System: DALI2

62386

Luminaire: Self-Contained

**Standards:** EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN **Certification:** CE, DALI2, ENEC, CIVIL DEFENSE



### Electrical characteristics

Supply: 230V 50Hz<2.5W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2,5~W \\ \textbf{Non-maintained mode consumption: } 0,9~W \\ \end{tabular}$ 

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 165 lm Maintained lumen output: 100 lm

Battery: 3.2V-1.8Ah LFP

Mode: M/NM
Power factor: - %
Signaling Luminaire: -

LED temperature: 4000°K

**Duration:** 3 h **Remote control:** No **Charging time:** 12 h

## **Mechanical characteristics**

**Housing:** Polycarbonate **Diffuser:** Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,19KG

## ATEX Envelope:

## Photometric curve

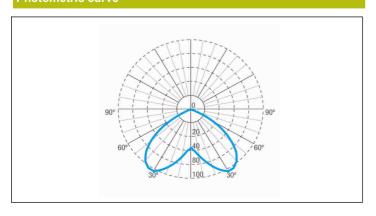

# Interdistanc<u>e</u>

Installation height		
2,0 m	7,41 m	7,41 m
2,5 m	8,47 m	8,47 m
3,0 m	9,43 m	9,43 m
3,5 m	10,25 m	10,25 m



# **LSM3170LAP3**



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

### Installation characteristics

SPAZIO ON

	Non-maintained luminaire	s use 4 terminals	(2xL + 2xN)	for supply	connection.
--	--------------------------	-------------------	-------------	------------	-------------

Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

perati		

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data	



# Datasheet SPAZIO ON

# **LSM3170LAP3**



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Accessories















