


Graphic reference



Dimensions

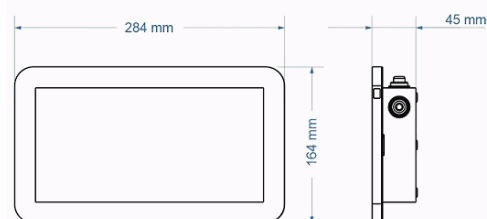

Control System: DALI2

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034, EN
61347-2-7, EN 61347-2-13, EN
62386, EN ISO7010

Certification: CE, DALI2



Electrical characteristics

Supply: 230V 50Hz<2.5W

Maintained mode consumption: 2.5 W

Non-maintained mode consumption: 0.9 W

Working temperature: 0-40°C

Emergency lamp: LEDS

Emergency lumen output: - lm

Maintained lumen output: - lm

Battery: 3.2V-1.8Ah LFP

Class: I

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 6000°K

Duration: 3 h

Remote control: Yes

Charging time: 12 h

Mechanical characteristics

Envelope: Sheet Iron

Diffuser: Methacrylate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: Grey RAL9006

Weight: 0,68KG

Photometric curve



Interdistance

Installation height

2,0 m

2,5 m

3,0 m

3,5 m



-

-

-

-

-

-

-

-

Installation characteristics

Possibility of installation in:

Wall surface.

Possibility of connection with:

Surface tube wiring. Connection via Ø6mm hose or Ø16mm or Ø20mm tube (3 inputs).

Vision distance: 24 m

Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data


Accessories

APX001



ACC. PANEL SURF. EXTYLE WHITE
WALL

ATX001



ACC. PANEL SURF. EXTYLE WHITE
CEILING