


LSQ9171LA3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

Graphic reference



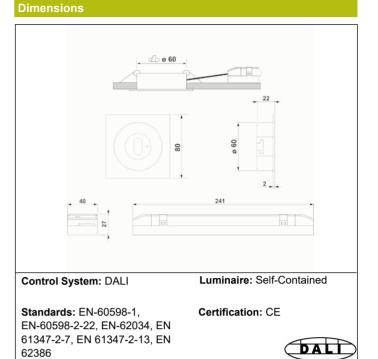


Electrical characteristics

Mechanical characteristics

Supply: 230V 50Hz<1.0W	Class: II	
Maintained mode consumption: - W	Mode: NM	
Non-maintained mode consumption: 1 W	Power factor: - %	
Working temperature: 0-40°C	Signaling Luminaire: -	
Emergency lamp: 1 x LED 3W	LED temperature: 4000°K	
Emergency lumen output: 165 lm	Duration: 3 h	
Maintained lumen output: - Im	Remote control: Yes	
Battery: 3.2V-1.8Ah LFP	Charging time: 12 h	

Envelope: Polycarbonate	IP/IK: IP42/IK04	
Diffuser: Escape Lens	Finish: White RAL9003	
Suitable for flammable surfaces: Yes		
	Weight: 0,48KG	
ATEX Envelope:		

Photometric curve

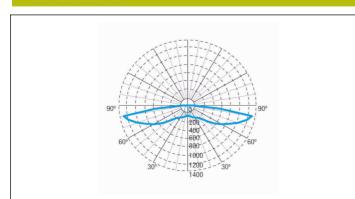

Interdistance

Installation height		
2,0 m	5,91 m	17,48 m
2,5 m	6,19 m	20,17 m
3,0 m	6,37 m	22,57 m
3,5 m	6,51 m	23,91 m



LSQ9171LA3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

Installation characteristics

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode. Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires), or without batteries (centralized luminaires) Possibility of installation in: Recessed ceiling.

Ceiling fixing by 2 springs.

Operating characteristics

Bus available for DALI communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data



LSQ9171LA3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ zemper.com w w w.zemper.com

Accessories



