

# LSQ9171LDP3W




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

## Graphic reference

SPAZIO Q



#### Dimensions

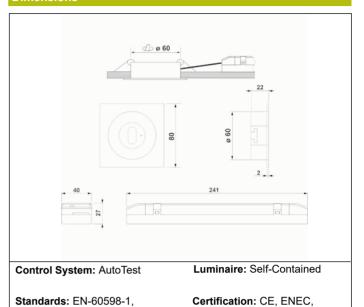

**CIVIL DEFENSE** 

### =1 - -4 -1 - -1 - -1 - - - -4 - -1 - 41 - -

Supply: 230V 50Hz<2.5W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2,5 \ W \\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0,9 \ W \\ \end{tabular}$ 

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 165 lm Maintained lumen output: 100 lm

Battery: 3.2V-1.8Ah LFP

Class: I

Mode: M/NM Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

EN-60598-2-22, EN-62034

**Duration:** 3 h **Remote control:** No **Charging time:** 12 h

## **Mechanical characteristics**

**Housing:** Polycarbonate **Diffuser:** Escape Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,25KG

# ATEX Envelope:

## Photometric curve

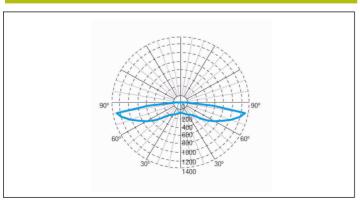

# Interdistance

Installation height			
2,0 m	5,91 m	17,48 m	
2,5 m	6,19 m	20,17 m	
3,0 m	6,37 m	22,57 m	
3,5 m	6,51 m	23,91 m	



# LSQ9171LDP3W



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Installation characteristics

SPAZIO Q

invalintained luminaires use 3 mains supply inputs $(L, L^1, N)$ to enable / disable the maintained mode.
Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires), or without batteries
(centralized luminaires)
Possibility of installation in:
Recessed ceiling.
Ceiling fixing by 2 springs.

## **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data		



# LSQ9171LDP3W



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### **Accessories**

SPAZIO Q











