

LSR9251LAP




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

Graphic reference

SPAZIO R



Dimensions

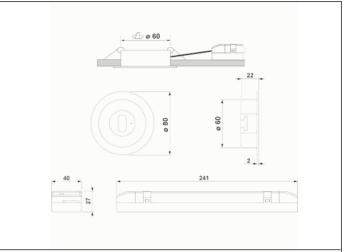

Control System: DALI2 Luminaire: Self-Contained

Standards: EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN 62386 Certification: CE, ENEC,

DALI2





Electrical characteristics

Supply: 230V 50Hz<2.8W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 2.8~W\\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W\\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 1XLEDS 3W Emergency lumen output: 250 lm Maintained lumen output: 150 lm

Battery: 3.2V-1.5Ah LFP

Mode: M/NM

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Envelope: Polycarbonate **Diffuser:** Escape Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,48KG

ATEX Envelope:

Photometric curve

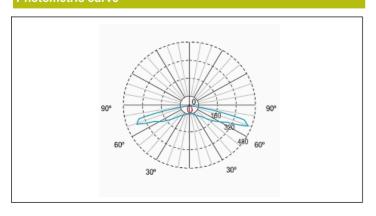

Interdistance

Installation height		
2,0 m	6,77 m	18,74 m
2,5 m	7,32 m	21,74 m
3,0 m	7,60 m	24,43 m
3,5 m	7,78 m	26,88 m



LSR9251LAP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com
www.zemper.com

Installation characteristics
Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode. Luminaires made up of a spotlight + electrical equipment with batteries (autonomous luminaires), or without batteries (centralized luminaires) Possibility of installation in: Recessed ceiling. Ceiling fixing by 2 springs.
Operating characteristics
Operating characteristics
Bus available for DALI2 communication. The luminaire has a status LED, which indicates: Green LED: OK Yellow LED flashing: Battery charging or battery connection failure. LED off: Emergency operation failure or mains failure or defective LED or defective unit.
General Envelope data



LSR9251LAP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com
www.zemper.com

Accessories



