


Graphic reference



Dimensions

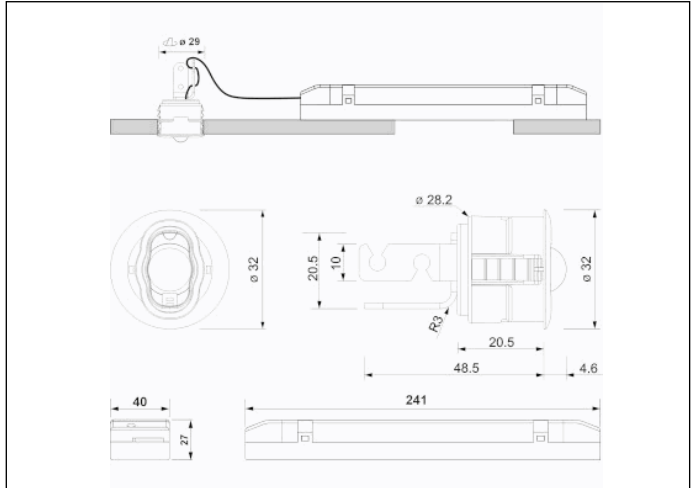

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034,
EN-61347-2-7, EN-61347-2-13,
EN-62386

Certification: CE



Electrical characteristics

Supply: 230V 50Hz<1.0W
Maintained mode consumption: - W
Non-maintained mode consumption: 1.0 W
Working temperature: 0-40°C
Emergency lamp: 1XLED 3W
Emergency lumen output: 165 lm
Maintained lumen output: - lm
Battery: 3.2V-1.8Ah LFP

Class: II
Mode: NM
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 3 h
Remote control: Yes
Charging time: 12 h


Mechanical characteristics

Envelope: Polycarbonate
Diffuser: Antipanic Lens
Suitable for flammable surfaces: Yes

IP/IK: IP42/IK04
Finish: White RAL9003
Weight: 0,48KG

ATEX Envelope:

Photometric curve

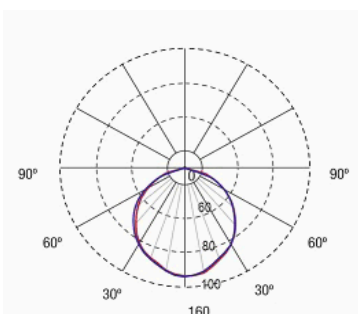

Interdistance

Installation height

Installation height	Interdistance 1	Interdistance 2
2,0 m	7,91 m	8,00 m
2,5 m	8,67 m	8,77 m
3,0 m	9,28 m	9,38 m
3,5 m	9,75 m	9,87 m

Installation characteristics

Maintained luminaires use 3 mains supply inputs (L, L1, N) to enable / disable the maintained mode.

Luminaires made up of a spotlight + electrical equipment with batteries (Self-contained luminaires).

Possibility of installation in:

- On suspended ceiling.

- Recessed ceiling (Slat ceilings) with accessory (included).

- Continuous rail.

Operating characteristics

Bus available for DALI communication.

The luminaire has a status LED, which indicates:

- Green LED: OK

- Yellow LED flashing: Battery charging or battery connection failure.

- LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data