

SPAZIO HIGH BAY


# LUE4700LX



ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

### Graphic reference



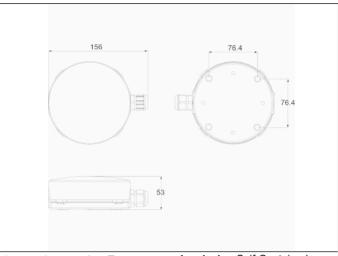

Luminaire: Self-Contained Control System: AutoTest

Certification: CE Standards: EN-60598-1,

EN-60598-2-22, EN-62034

Supply: 230V 50Hz<2.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 2.2 W

Working temperature: 0-40°C Emergency lamp: 12xLED 0.5W Emergency lumen output: 680 lm Maintained lumen output: - Im Battery: 6.4V-1.5Ah LFP

Class: II Mode: NM

Power factor: - % Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h Remote control: No Charging time: 24 h

# **Mechanical characteristics**

Envelope: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


IP/IK: IP65/IK10

Finish: White RAL9003

Weight: 0,43KG

ATEX Envelope:

## **Photometric curve**

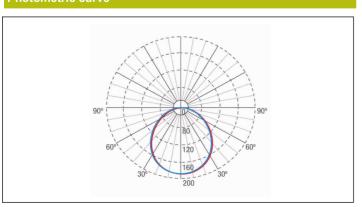

## Interdistance

Installation height		
2,0 m	9,80 m	9,78 m
2,5 m	12,26 m	12,23 m
3,0 m	13,57 m	13,54 m
3,5 m	14,55 m	14,52 m



SPAZIO HIGH BAY

# LUE4700LX



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

#### Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.

Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

designed to be installed at high heights (>5m)

Luminaire

### **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Status of Emergency functionality.

Test status.

Microprocessor controlled luminaire which performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

The luminaire has a built-in button, which allows:

Put on Standby without power supply.

General Envelope data		