


### Graphic reference

### Dimensions

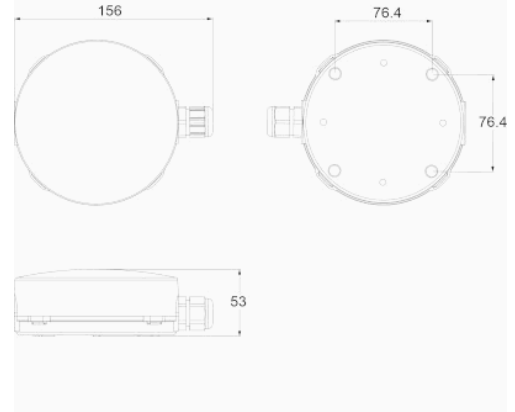

**Control System:** AutoTest

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Certification:** CE

### Electrical characteristics

**Supply:** 230V 50Hz<2.2W

**Maintained mode consumption:** - W

**Non-maintained mode consumption:** 2,2 W

**Working temperature:** 0-40°C

**Emergency lamp:** 12xLED 0.5W

**Emergency lumen output:** 680 lm

**Maintained lumen output:** - lm

**Battery:** 6.4V-1.5Ah LFP

**Class:** II

**Mode:** Non-maintained

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 1 h

**Remote control:** No

**Charging time:** 24 h

### Mechanical characteristics

**Housing:** Polycarbonate

**Diffuser:** Transparent Polycarbonate

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP65/IK10

**Finish:** White RAL9003

**Weight:** 0,35KG

### Photometric curve

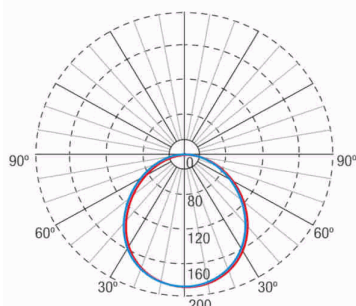

### Interdistance

**Installation height**

2,0 m

2,5 m

3,0 m

3,5 m



9,80 m

12,26 m

13,57 m

14,55 m

9,78 m

12,23 m

13,54 m

14,52 m

### Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.  
Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.  
Installation with mounting plate.  
Possibility of installation in:  
    Ceiling surface.  
    Recessed ceiling (with installation accessory)  
Possibility of connection with:  
    Recessed wiring.  
    Surface tube wiring (max. M20)  
designed to be installed at high heights (>5m)

Luminaire

### Operating characteristics

The luminaire has status LEDs, which indicates:  
    Status of the battery charging circuit.  
    Battery status (duration)  
    Status of Emergency functionality.  
    Test status.  
Microprocessor controlled luminaire which performs periodic and automatic tests.  
    Functional test every 7 days.  
    Duration test every 365 days.  
The test result is shown in the status indicator LEDs.  
The luminaire has a built-in button, which allows:  
    Put on Standby without power supply.

### General Envelope data