


### Graphic reference



### Dimensions

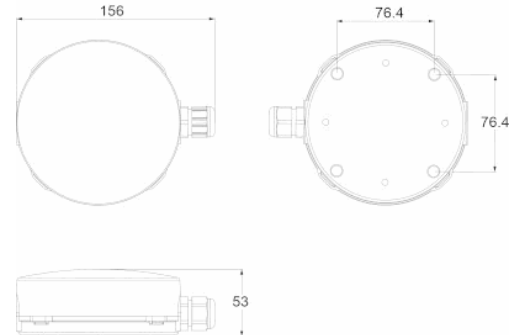

**Control System:** DALI2

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034, EN  
61347-2-7, EN 61347-2-13, EN  
62386

**Certification:** CE, DALI2



### Electrical characteristics

**Supply:** 230V 50Hz<2.8W  
**Maintained mode consumption:** 2.8 W  
**Non-maintained mode consumption:** 0.9 W  
**Working temperature:** -10°C / 40°C  
**Emergency lamp:** 1 x LED 3W  
**Emergency lumen output:** 250 lm  
**Maintained lumen output:** 150 lm  
**Battery:** 3.2V-1.5Ah LFP

**Class:** II  
**Mode:** M/NM  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 1 h  
**Remote control:** Yes  
**Charging time:** 24 h


### Mechanical characteristics

**Envelope:** Polycarbonate  
**Diffuser:** Hall Lens / Wall  
**Suitable for flammable surfaces:** Yes

**ATEX Envelope:**

**IP/IK:** IP65/IK10  
**Finish:** White RAL9003  
**Weight:** 0,45KG

### Photometric curve

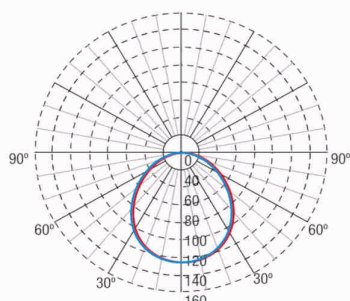

### Interdistance

**Installation  
height**



|       |         |         |
|-------|---------|---------|
| 2,0 m | 8,58 m  | 8,57 m  |
| 2,5 m | 9,48 m  | 9,47 m  |
| 3,0 m | 10,22 m | 10,22 m |
| 3,5 m | 10,86 m | 10,85 m |

### Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.  
Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.  
Installation with mounting plate.  
Possibility of installation in:  
Ceiling/Wall surface.  
Possibility of connection with:  
Surface tube wiring (max. M20)

### Operating characteristics

Bus available for DALI2 communication.  
The luminaire has a status LED, which indicates:  
Green LED: OK  
Yellow LED flashing: Battery charging or battery connection failure.  
LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data