

LUT3400LAP




ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

Graphic reference

Datasheet S. OUTDOOR



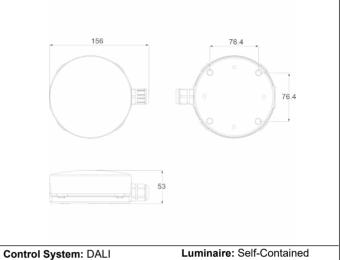

Certification: CE

Standards: EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN



Supply: 230V 50Hz<3.8W

Maintained mode consumption: $3.8\ W$ Non-maintained mode consumption: 0.9 W Working temperature: -10°C / 40°C Emergency lamp: 12xLED 0.5W Emergency lumen output: 425 lm

Maintained lumen output: 250 lm Battery: 3.2V-1.5Ah LFP

Mode: M/NM Power factor: - % Signaling Luminaire: -

62386

LED temperature: 4000°K

Duration: 1 h Remote control: Yes Charging time: 24 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Transparent Polycarbonate Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP65/IK10

Finish: White RAL9003

Weight: 0,16KG

Photometric curve

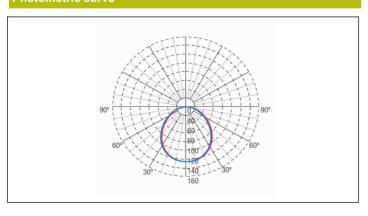

Interdistance

9,80 m	9,78 m
10,98 m	10,96 m
11,92 m	11,91 m
12,74 m	12,73 m
	10,98 m 11,92 m



S. OUTDOOR

LUT3400LAP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com
www.zemper.com

Installation characteristics
Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection. Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode. Installation with mounting plate. Possibility of installation in: Ceiling/Wall surface. Possibility of connection with: Surface tube wiring (max. M20)
Operating characteristics
Bus available for DALI communication. The luminaire has a status LED, which indicates: Green LED: OK Yellow LED flashing: Battery charging or battery connection failure. LED off: Emergency operation failure or mains failure or defective LED or defective unit.
General Envelope data