

Datasheet SPAZIO LUZ

LUZ4300X




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference



Dimensions

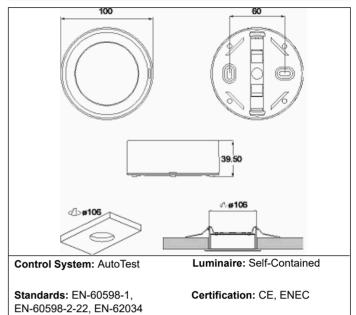

Electrical characteristics

Supply: 230V 50Hz<2.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 2,2 $\ensuremath{\text{W}}$

Working temperature: 0-40°C Emergency lamp: 12xLED 0.5W Emergency lumen output: 300 lm Maintained lumen output: - lm Battery: 3.6V-1.1Ah Ni-Cd Class: II

Mode: NM

Power factor: - %
Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,16KG

ATEX Envelope:

Photometric curve

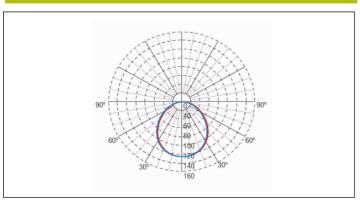

Interdistance

Installation height		
2,0 m	9,03 m	9,01 m
2,5 m	9,98 m	9,97 m
3,0 m	10,79 m	10,79 m
3,5 m	11,49 m	11,48 m



LUZ4300X



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.

Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Status of Emergency functionality.

Test status.

General Envelope data

Microprocessor controlled luminaire which performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

The luminaire has a built-in button, which allows:

Put on Standby without power supply.



LUZ4300X



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@ z em p e r . c o m
w w w w . z e m p e r . c o m

Accessories

CEILING SQUARE

SPAZIO LUZ















