

Datasheet **DIANA IP66**


LXE3100C



ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference



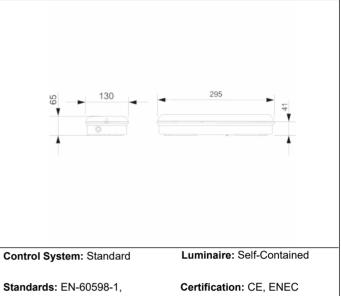

EN-60598-2-22



Supply: 230V 50Hz<0.6W

Maintained mode consumption: - W

Non-maintained mode consumption: 0,6 W

Working temperature: 0-40°C Emergency lamp: 2 x LED 0.5W Emergency lumen output: 95 lm Maintained lumen output: - Im Battery: 3.6V-0.3Ah Ni-Cd

Class: II Mode: NM

Power factor: - % Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h Remote control: No Charging time: 24 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transparent Polycarbonate


Suitable for flammable surfaces: Yes

ATEX Envelope:

IP/IK: IP66/IK10 Finish: Transparent

Weight: 0,42KG

Photometric curve

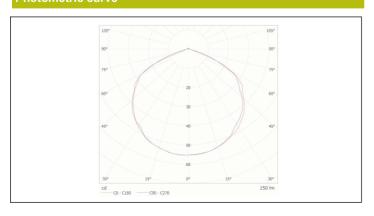

Interdistance

7,05 m	7.00
7,00 111	7,08 m
7,57 m	7,70 m
7,92 m	8,07 m
8,16 m	8,21 m
	7,92 m



LXE3100C



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com
www.zemper.com

Installation characteristics
Maintained luminaires have a selector bridge to enable / disable the maintained mode. Possibility of installation in: Ceiling/Wall surface. Possibility of connection with: Surface tube wiring. It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.
Operating characteristics
The luminaire has a status LED, which indicates: Status of the battery charging circuit. Green on = Battery charge OK. Off = Wrong battery charge. Remote control input that allows: Put on standby without power supply. Restart in emergency status without power supply. Emergency statust test with power supply
General Envelope data



LXE3100C



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com
www.zemper.com

Accessories

