

LXE9400LXP




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference

DIANA IP66



Dimensions

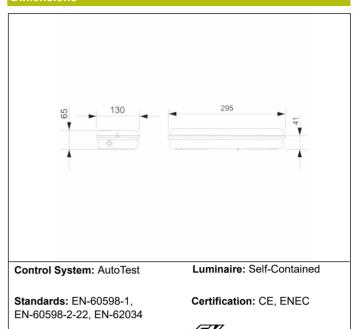

Electrical characteristics

Supply: 230V 50Hz<3.8W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 3,8~W\\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0,9~W\\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 12 x LED 0.5W Emergency lumen output: 390 lm Maintained lumen output: 235 lm

Battery: 3.2V-1.5Ah LFP

Class: II Mode: -

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h **Remote control:** Yes **Charging time:** 12 h

Mechanical characteristics

Housing: Polycarbonate


Diffuser: Transparent Polycarbonate **Suitable for flammable surfaces:** Yes

IP/IK: IP66/IK10
Finish: Transparent

Weight: 0,66KG

Photometric curve

ATEX Envelope:

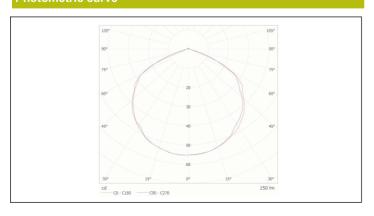

Interdistance

9,83 m	0.54
3,00 111	9,54 m
11,21 m	11,19 m
12,42 m	12,57 m
13,50 m	13,61 m
	12,42 m



LXE9400LXP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

Installation characteristics

DIANA IP66

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

(General Envelope data



LXE9400LXP



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com
www.zemper.com

Accessories

