

LXF9050CT



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ ze m p e r . c o m
w w w w . z e m p e r . c o m

Graphic reference

XENA FLAT



Dimensions



Electrical characteristics

Supply: 230V 50Hz<0.6W

Maintained mode consumption: - W

Non-maintained mode consumption: $0.6\ W$

Working temperature: 0-40°C Emergency lamp: 2 x LED 0.5W Emergency lumen output: 50 lm Maintained lumen output: - lm Battery: 3.6V-0.3Ah Ni-Cd Class: II

Mode: NM

Power factor: - %

Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


IP/IK: IP44/IK07

Finish: White RAL9003

Weight: 0,42KG

ATEX Envelope:

Photometric curve

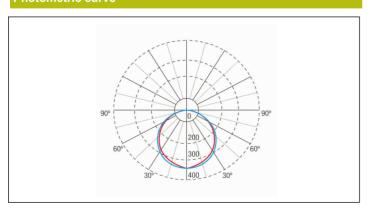

Interdistance

| Installation height | | |
|------------------------|--------|--------|
| 2,0 m | 5,93 m | 5,14 m |
| 2,5 m | 5,60 m | 5,52 m |
| 3,0 m | 5,23 m | 5,63 m |
| 3,5 m | 5,15 m | 5,55 m |
| | | |



LXF9050CT



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Installation characteristics

| Maintained luminaires have a selector | bridge to enable / | disable the maintained mode. |
|---------------------------------------|--------------------|------------------------------|
| Installation with mounting plate. | | |

Possibility of installation in:

Ceiling/Wall surface.

Reccesed in ceiling.

Semi-reccesed in wall.

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

Operating characteristics

The luminaire has a status LED, which indicates:

Status of the battery charging circuit.

Green on = Battery charge OK.

Off = Wrong battery charge.

Remote control input that allows:

Put on standby without power supply.

Restart in emergency status without power supply.

Emergency statust test with power supply

| General | Enve | lope (| data |
|---------|------|--------|------|
| | | | |



LXF9050CT



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Accessories

















