

# LXF9150LX3T




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

### Graphic reference

**XENA FLAT** 



#### Dimensions

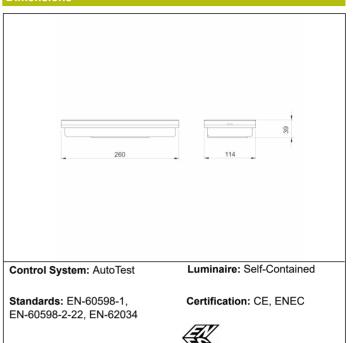

#### Electrical characteristics

Supply: 230V 50Hz<1.0W

Maintained mode consumption: - W Non-maintained mode consumption: 1 W

Working temperature: 0-40°C Emergency lamp: 4 x LED 0.5W Emergency lumen output: 150 lm Maintained lumen output: - lm Battery: 3.2V-1.5Ah LFP Class: II Mode: NM

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

**Duration:** 3 h **Remote control:** Yes **Charging time:** 12 h

### **Mechanical characteristics**

Envelope: Polycarbonate

**Diffuser:** Transparent Polycarbonate **Suitable for flammable surfaces:** Yes


IP/IK: IP44/IK07

Finish: White RAL9003

Weight: 1,00KG

## ATEX Envelope:

## Photometric curve

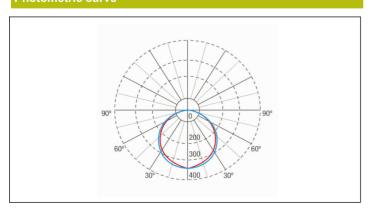

## Interdistance

| Installation<br>height |         |        |
|------------------------|---------|--------|
| 2,0 m                  | 9,14 m  | 6,72 m |
| 2,5 m                  | 9,84 m  | 7,61 m |
| 3,0 m                  | 10,34 m | 8,34 m |
| 3,5 m                  | 10,27 m | 8,95 m |



# LXF9150LX3T



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

#### Installation characteristics

**XENA FLAT** 

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Reccesed in ceiling.

Semi-reccesed in wall.

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

### **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

| General Envelope data |  |  |
|-----------------------|--|--|
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |
|                       |  |  |



# **LXF9150LX3T**



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

#### **Accessories**

















