

## LXF9400LDPWT




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

### **Graphic reference**

**XENA FLAT** 



#### Dimensions

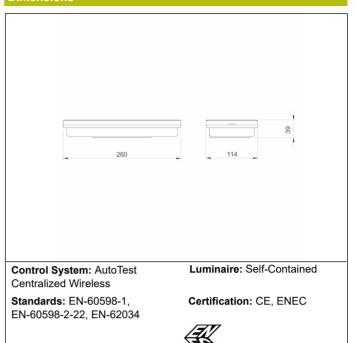

#### Electrical characteristics

**Supply:** 230V 50Hz<3.6W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 3.6~W \\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } 0.9~W \\ \end{tabular}$ 

Working temperature: 0-40°C Emergency lamp: 12 x LED 0.5W Emergency lumen output: 390 lm Maintained lumen output: 195 lm Battery: 3.2V-1.5Ah LFP Class: II

Mode: M/NM

Power factor: - %

Signaling Luminaire: 
LED temperature: 4000°K

**Duration:** 1 h **Remote control:** No **Charging time:** 12 h

### **Mechanical characteristics**

Envelope: Polycarbonate

**Diffuser:** Transparent Polycarbonate **Suitable for flammable surfaces:** Yes


IP/IK: IP44/IK07

Finish: White RAL9003

Weight: 1,00KG

ATEX Envelope:

## Photometric curve

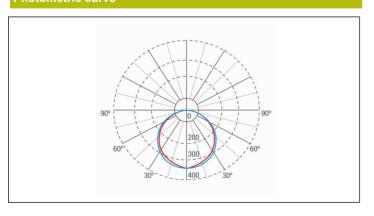

## Interdistance

Installation height		
2,0 m	10,17 m	10,02 m
2,5 m	11,29 m	11,09 m
3,0 m	12,24 m	11,98 m
3,5 m	13,06 m	12,75 m
3,5 m	13,06 m	12,75 m



# LXF9400LDPWT



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

### Installation characteristics

Maintained luminaires have a selector bridge to enable /	disable the maintained mode.
Installation with mounting plate.	

Possibility of installation in:

Ceiling/Wall surface.

Reccesed in ceiling.

Semi-reccesed in wall.

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

### **Operating characteristics**

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data	



# LXF9400LDPWT



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

#### **Accessories**

















