


### Graphic reference



### Dimensions

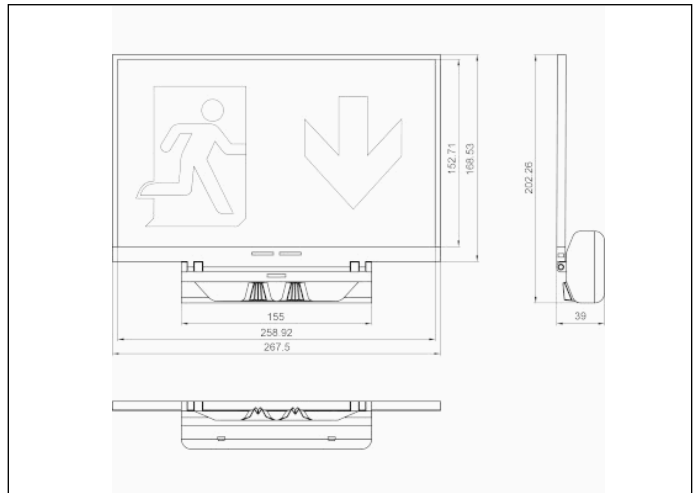

**Control System:** DALI2

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN 61347-2-7,  
EN 61347-2-13, EN 62386

**Certification:** CE, ENEC,  
DALI2, CIVIL DEFENSE



### Electrical characteristics

**Supply:** 230V 50Hz<3.3W

**Maintained mode consumption:** 3,3 W

**Non-maintained mode consumption:** 2,5 W

**Working temperature:** 0-40°C

**Emergency lamp:** 25xLED 0.5W

**Emergency lumen output:** 120 lm

**Maintained lumen output:** 70 lm

**Battery:** 3.2V-3.0Ah LFP

**Class:** II

**Mode:** -

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 3 h

**Remote control:** No

**Charging time:** 12 h

### Mechanical characteristics

**Housing:** Polycarbonate

**Diffuser:** Antipanic Lens

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP42/IK04

**Finish:** White RAL9003

**Weight:** 0,45KG

### Photometric curve



### Interdistance

**Installation height**

Installation height	Interdistance (Left)	Interdistance (Right)
2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m

### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).  
Installation with mounting plate.  
Possibility of installation in:  
    Wall surface.  
Possibility of connection with:  
    Surface tube wiring.  
Vision distance: 25 m

### Operating characteristics

Bus available for DALI2 communication.  
The luminaire has a status LED, which indicates:  
    Green LED: OK  
    Yellow LED flashing: Battery charging or battery connection failure.  
    LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data