

EXITALYA WITH DOWNLIGHT


LYE3125LAP3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ zem per.com w w w.zem per.com

Graphic reference	Dimensions	
<image/>	Image: Second system Image: Second system Standards: EN-60598-12-22, EN-62034, EN G1347-2-7, EN 61347-2-13, EN Image: Second system G236 Image: Second system	
Supply: 230V 50Hz<3.3W Maintained mode consumption: 3,3 W Non-maintained mode consumption: 2,5 W Working temperature: 0-40°C Emergency lamp: 25xLED 0.5W Emergency lumen output: 120 lm Maintained lumen output: 70 lm Battery: 3.2V-3.0Ah LFP	Class: II Mode: - Power factor: - % Signaling Luminaire: - LED temperature: 4000°K Duration: 3 h Remote control: No Charging time: 12 h	
Mechanical characteristics Housing: Polycarbonate Diffuser: Antipanic Lens Suitable for flammable surfaces: Yes	IP/IK: IP42/IK04 Finish: White RAL9003 Weight: 0,45KG	
ATEX Envelope:		

Photometric curve

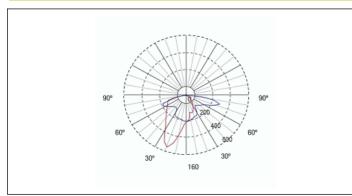

Interdistance

nstallation neight		
2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m
3,5 m	6,32 m	6,7



LYE3125LAP3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN). Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting). Installation with mounting plate. Possibility of installation in: Wall surface. Possibility of connection with: Surface tube wiring. Vision distance: 25 m

Operating characteristics

Bus available for DALI communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data