


### Graphic reference



### Dimensions

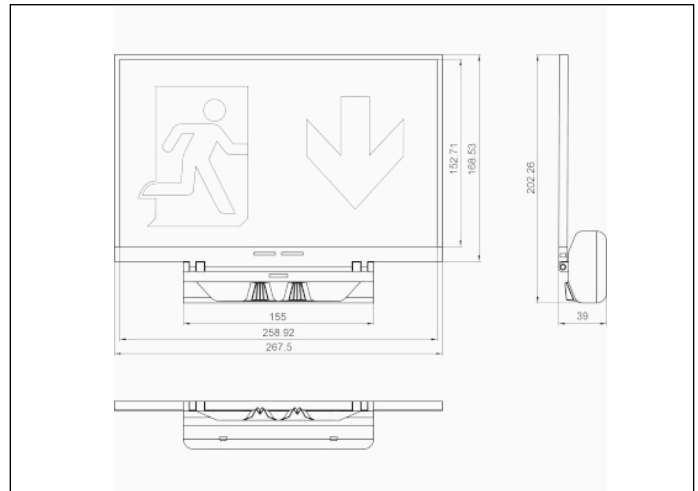

**Control System:** AutoTest

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Certification:** CE, ENEC



### Electrical characteristics

**Supply:** 230V 50Hz<3.3W

**Maintained mode consumption:** 3.3 W

**Non-maintained mode consumption:** 2.5 W

**Working temperature:** 0-40°C

**Emergency lamp:** 25xLED 0.5W

**Emergency lumen output:** 120 lm

**Maintained lumen output:** 70 lm

**Battery:** 3.2V-1.5Ah LFP

**Class:** II

**Mode:** M/NM

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 1 h

**Remote control:** Yes

**Charging time:** 12 h

### Mechanical characteristics

**Envelope:** Polycarbonate

**Diffuser:** Antipanic Lens

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP42/IK04

**Finish:** White RAL9003

**Weight:** 0,56KG

### Photometric curve

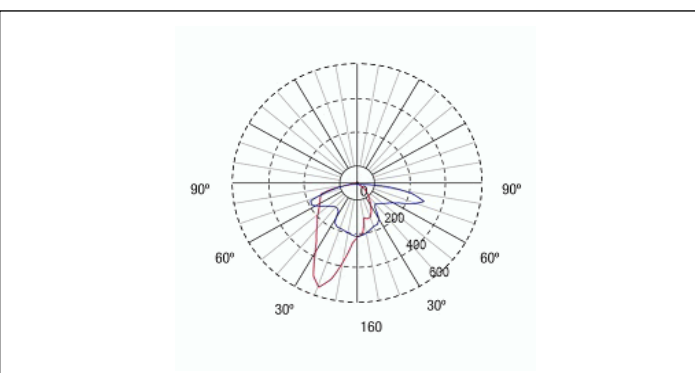

### Interdistance

**Installation height**

Installation height	Interdistance	Interdistance
2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m

### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).  
Installation with mounting plate.  
Possibility of installation in:  
    Wall surface.  
Possibility of connection with:  
    Surface tube wiring.  
Vision distance: 25 m

### Operating characteristics

The luminaire has status LEDs, which indicates:  
    Status of the battery charging circuit.  
    Battery status (duration)  
    Emergency status function.  
    Test status.  
Microprocessor controlled luminaire that performs periodic and automatic tests.  
    Functional test every 7 days.  
    Duration test every 365 days.  
The test result is shown in the status indicator LEDs.

Remote control input that allows:  
    Put on Standby without power supply.  
    Restart in emergency status without power supply.  
    Switch on in emergency status (more than 24 h of charge)  
    Manual and remote duration test. (more than 24 hours of charge).  
    Date and time programming of the tests.  
    Reset of the luminaire status.

### General Envelope data