

LYEX5120LAP3




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel:. +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ ze m p e r.co m
w w w v.ze m p e r.co m

Datasheet EXITALYA MAXI with Downlight

Graphic reference



Dimensions

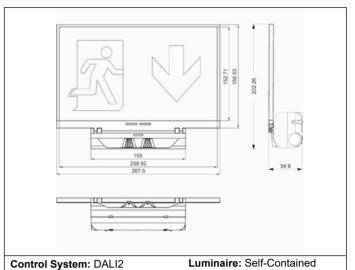

Control System. DALIZ

Standards: EN-60598-1, EN-60598-2-22, EN 61347-2-7, EN 61347-2-13, EN 62386 Certification: CE, DALI2



Electrical characteristics

Supply: 230V 50Hz<2.5W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: 2,5 W} \\ \textbf{Non-maintained mode consumption: - W} \\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 25xLED 0.5W Emergency lumen output: 65 lm Maintained lumen output: - lm Battery: 3.2V-3.0Ah LFP Class: II Mode: M

Power factor: - % Signaling Luminaire: -LED temperature: 6500°K

Duration: 3 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate **Diffuser:** Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,45KG

ATEX Envelope:

Photometric curve

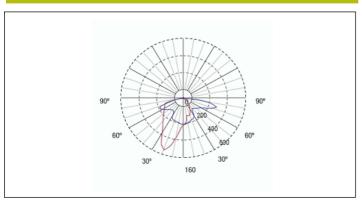

Interdistance

Installation height		
2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m



LYEX5120LAP3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Datasheet EXITALYA MAXI with Downlight

Installation characteris	

Maintained luminaires use 4 terminals (2xL + 2xN).

Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).

Installation with mounting plate.

Possibility of installation in:

Wall surface.

Possibility of connection with:

Surface tube wiring.

Vision distance: 25 m

perati			

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data						