

LYW3150LX3




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel:: +34 902 11 11 97
Fax: +34 902 11 11 97
info@zemper.com

Graphic reference

WALYA



Dimensions

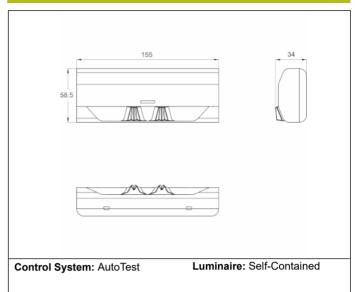

Standards: EN-60598-1, EN-60598-2-22, EN-62034

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<1.0W

Maintained mode consumption: - W

Non-maintained mode consumption: 1,0 W

Working temperature: 0-40°C
Emergency lamp: 4 x LED 0.5W
Emergency lumen output: 150 lm
Maintained lumen output: - lm
Battery: 3.2V-1.5Ah LFP

Class: II

Mode: NM Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 3 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate **Diffuser:** Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,16KG

ATEX Envelope:

Photometric curve

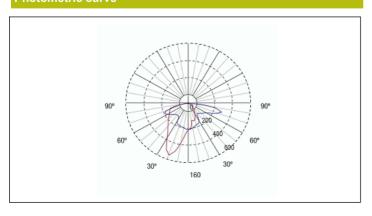

Interdistance

9,07 m	6,39 m
8,96 m	6,86 m
8,37 m	7,20 m
7,70 m	7,41 m
	8,96 m 8,37 m



Recessed wiring.

LYW3150LX3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

Installation characteristics

WALYA

Maintained luminaires use 4 terminals (2xL + 2xN)
Installation with mounting plate.
Possibility of installation in:
Wall surface.
Possibility of connection with:

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

General Envelope data		