


PMV1500LC3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z e m p e r. c o m w w w. z e m p e r. c o m

Graphic reference



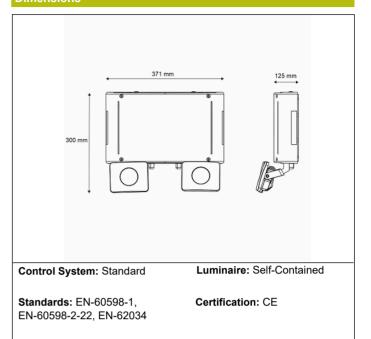


Electrical characteristics

Mechanical characteristics

Supply: 230V 50Hz<3.0W	Class: II	
Maintained mode consumption: - W	Mode: NM	
Non-maintained mode consumption: 3,0 W	Power factor: - %	
Working temperature: 0°C - 40°C	Signaling Luminaire: -	
Emergency lamp: 2x LEDS 10W	LED temperature: 4000°K	
Emergency lumen output: 1500 lm	Duration: 3 h	
Maintained lumen output: - Im	Remote control: Yes	
Battery: 2x(12.8V-3.0Ah LFP)	Charging time: 12 h	

Housing: Polycarbonate IP/IK: IP65/IK07 Diffuser: Glass Finish: White RAL9003 Suitable for flammable surfaces: Yes Weight: 3,76KG ATEX Envelope:

Photometric curve

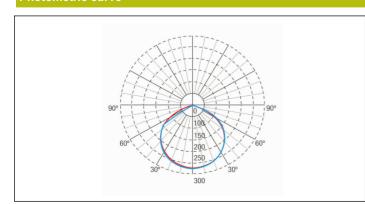

Interdistance

Installation height		
2,0 m	9,79 m	8,57 m
2,5 m	12,24 m	10,71 m
3,0 m	14,69 m	12,86 m
3,5 m	17,14 m	15,00 m



PMV1500LC3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ z em per.com w w w.z em per.com

Installation characteristics

Possibility of installation in: Ceiling/Wall surface. Possibility of connection with: Surface tube wiring. It has 4 pre-marked entries for PG-11 (included) Two orientable spotlights, horizontally y vertically. Specially designed to cover large areas and / or heights.

Operating characteristics

The luminaire has a status LED, which indicates: Status of the battery charging circuit. On = Battery charge OK. Off = Wrong battery charge. Remote control input that allows: Put on standby without power supply. Restart in emergency status without power supply. Emergency statust test with power supply

General Envelope data



PMV1500LC3



ELECTROZEMPER S.A. Avda. de la Ciencia s/n. Parque Ind. Avanzado 13005 Ciudad Real. Spain. Tel.: +34 902 11 11 97 Fax: +34 902 11 11 97 in fo @ zemper.com w w w.zemper.com

Accessories

