


Graphic reference



Dimensions

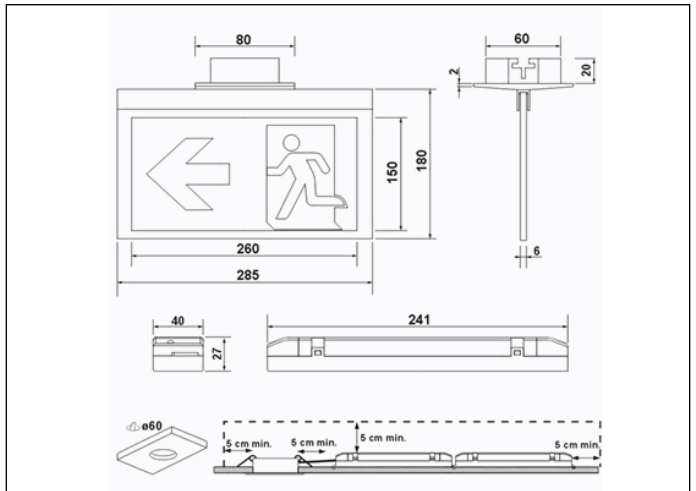

Control System: DALI2

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034, EN
61347-2-7, EN 61347-2-13, EN
62386

Certification: CE, DALI2



Electrical characteristics

Supply: 230V 50Hz<2.9W

Maintained mode consumption: 2,9 W

Non-maintained mode consumption: - W

Working temperature: 0-40°C

Emergency lamp: 8xLEDS 0.5W

Emergency lumen output: - lm

Maintained lumen output: - lm

Battery: 3.2V-1.0Ah LFP

Class: II

Mode: Non-maintained / Maintained via third terminal

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Methacrylate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,65KG

Photometric curve



Interdistance

**Installation
height**

2,0 m

2,5 m

3,0 m

3,5 m



-

-

-

-

-

-

-

-

Installation characteristics

Maintained luminaires use 3 terminals to enable / disable the maintained mode.

Luminaires made up of a spotlight + electrical equipment with batteries.

Possibility of installation in:

Recessed ceiling.

Ceiling fixing by 2 springs.

Vision distance: 25,8 m

Two type of pictograms (according to reference):

Man with arrow up/down : ref LSS***6***

Man with arrow right/left : ref LSS***5***

Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data