


Graphic reference



Dimensions

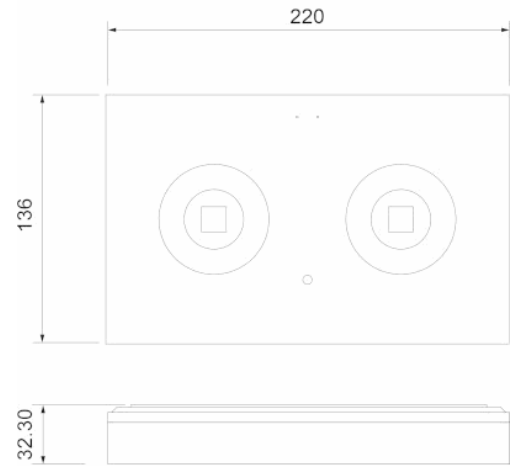

Control System: AutoTest

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<2.8W

Maintained mode consumption: 2,8 W

Non-maintained mode consumption: 1,0 W

Working temperature: 0-40°C

Emergency lamp: 2XLEDS 3W

Emergency lumen output: 280 lm

Maintained lumen output: 170 lm

Battery: 3.2V-3.0Ah LFP

Class: II

Mode: M/NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 3 h

Remote control: Yes

Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Hall Lens / Wall

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,58KG

Photometric curve



Interdistance

Installation height

2,0 m	8,92 m	7,19 m
2,5 m	9,89 m	8,26 m
3,0 m	10,79 m	9,24 m
3,5 m	11,56 m	10,09 m

Installation characteristics

The permanent luminaires have three network connection terminals to enable / disable the permanent function.

Installation with preplate.

Possibility of installation:

Wall surface (special lighting for corridors and landings)

Possibility of connection:

Embedded wiring

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

General Envelope data

Accessories

AMT0061



ACC. REC. SPAZIO TOLEDO IP40
WHITE CEILING