


Graphic reference



Dimensions

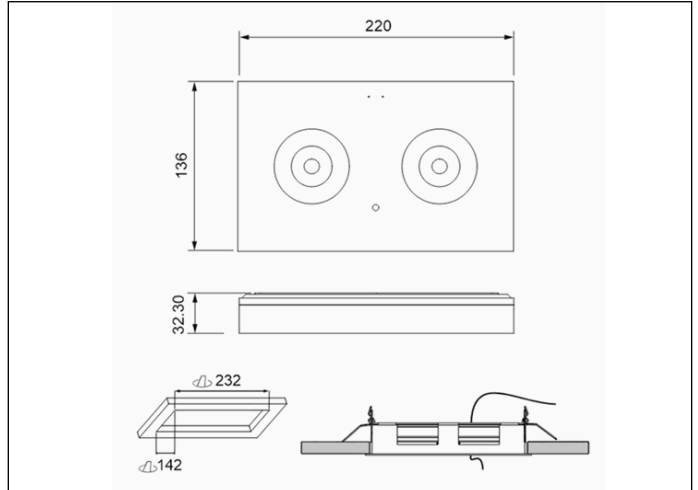

Control System: AutoTest
Centralized Wireless
Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Luminaire: Self-Contained
Certification: CE

Electrical characteristics

Supply: 230V 50Hz<3.8W
Maintained mode consumption: 3.8 W
Non-maintained mode consumption: 1.0 W
Working temperature: 0-40°C
Emergency lamp: 2XLEDS 3W
Emergency lumen output: 500 lm
Maintained lumen output: 300 lm
Battery: 3.2V-3.0Ah LFP

Class: II
Mode: M/NM
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 1 h
Remote control: No
Charging time: 12 h


Mechanical characteristics

Envelope: Polycarbonate
Diffuser: Antipanic Lens
Suitable for flammable surfaces: Yes

ATEX Envelope:

IP/IK: IP42/IK04
Finish: White RAL9003
Weight: 0,58KG

Photometric curve

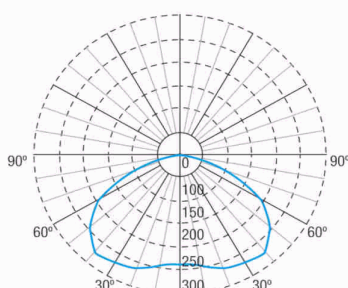

Interdistance

Installation height

Installation height	Interdistance (Left)	Interdistance (Right)
2,0 m	9,31 m	9,23 m
2,5 m	10,66 m	10,56 m
3,0 m	12,09 m	11,91 m
3,5 m	13,36 m	13,12 m

Installation characteristics

Maintained luminaires use 3 terminals to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed in ceiling.

Possibility of connection with:

Surface tube wiring.

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data

Accessories

AMT0061



ACC. REC. SPAZIO TOLEDO IP40
WHITE CEILING

ABX0061



ACC. PANEL REC. SPAZIO TOLEDO
WHITE TRANSP.

ABX1761



ACC. PANEL REC. SPAZIO TOLEDO
WHITE SERIG. RIGHT/LEFT ARROW