


Graphic reference

Dimensions

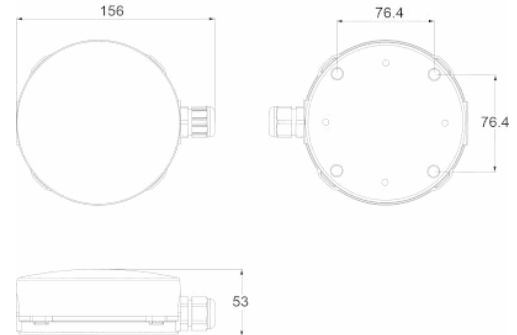

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE



Electrical characteristics

Supply: 230V 50Hz<2.5W

Maintained mode consumption: 2,5 W

Non-maintained mode consumption: 0,9 W

Working temperature: -10°C / 40°C

Emergency lamp: 12xLED 0.5W

Emergency lumen output: 170 lm

Maintained lumen output: 100 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: Non-maintained / Maintained via third terminal

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 3 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP65/IK10

Finish: White RAL9003

Weight: 0,34KG

Photometric curve

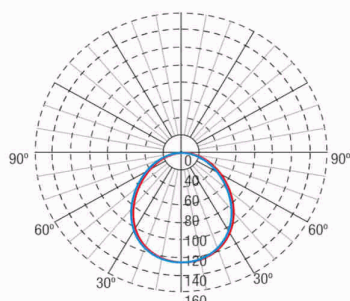

Interdistance

Installation height

2,0 m

2,5 m

3,0 m

3,5 m



7,72 m

8,47 m

9,08 m

9,58 m

7,70 m

8,46 m

9,08 m

9,58 m

Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.
Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
Possibility of connection with:
 Surface tube wiring (max. M20)

Operating characteristics

Bus available for DALI communication.
The luminaire has a status LED, which indicates:
 Green LED: OK
 Yellow LED flashing: Battery charging or battery connection failure.
 LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data

Accessories

COVER-LUTW



ACC. COVER SPZ LUT WHITE -
STRUCTUUR BELUX