


Graphic reference



Dimensions

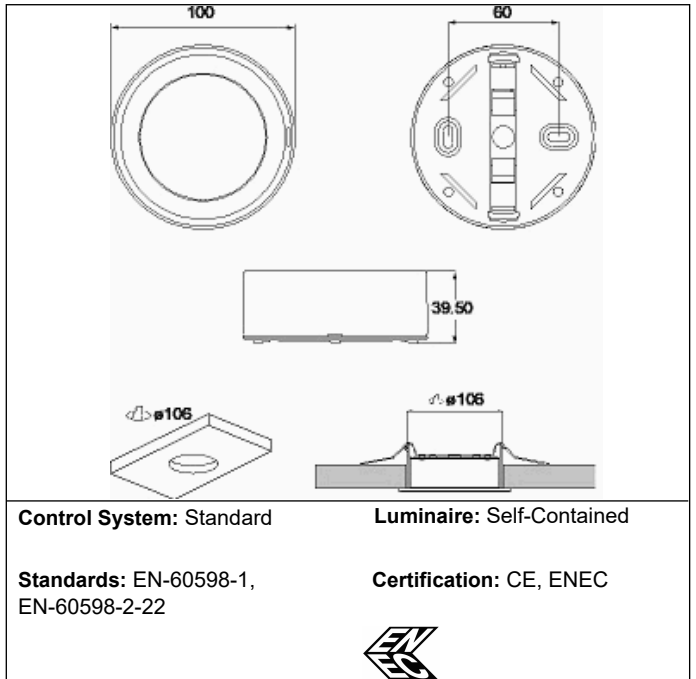

Electrical characteristics

Supply: 230V 50Hz<0.6W
Maintained mode consumption: - W
Non-maintained mode consumption: 0,6 W
Working temperature: 0-40°C
Emergency lamp: 12xLED 0.5W
Emergency lumen output: 90 lm
Maintained lumen output: - lm
Battery: 3.6V-0.3Ah Ni-Cd

Class: II
Mode: NM
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 1 h
Remote control: No
Charging time: 24 h


Mechanical characteristics

Housing: Polycarbonate
Diffuser: Transparent Polycarbonate
Suitable for flammable surfaces: Yes

IP/IK: IP42/IK04
Finish: White RAL9003
Weight: 0,16KG

ATEX Envelope:

Photometric curve

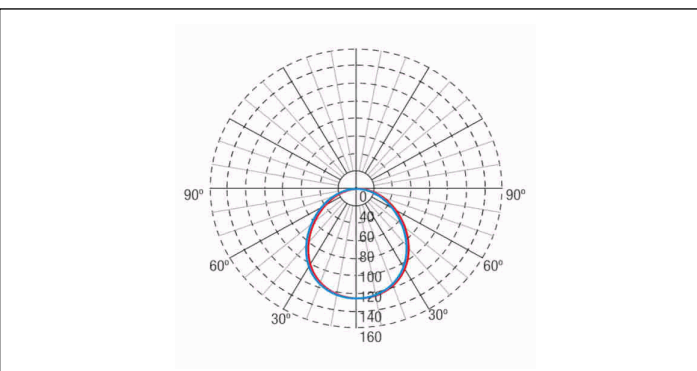

Interdistance

Installation height	Interdistance	
	Left	Right
2,0 m	6,39 m	6,39 m
2,5 m	6,93 m	6,92 m
3,0 m	7,32 m	7,32 m
3,5 m	7,59 m	7,59 m

Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.
Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
 Recessed ceiling (with installation accessory)
Possibility of connection with:
 Recessed wiring.
 Surface tube wiring (max. M20)

Operating characteristics

The luminaire has a status LED, which indicates:
 Status of the battery charging circuit.
 Green on = Battery charge OK.
 Off = Wrong battery charge.
Remote control input that allows:
 Put on standby without power supply.

General Envelope data

Accessories

ALQ0011



ACC. REC. SPAZIO LUZ WHITE
CEILING SQUARE

ALC0011



ACC. REC. SPAZIO LUZ WHITE
CEILING ROUND

ALE0065



ACC. HOUSING IP65 SPAZIO LUZ
WHITE

ALX0011



ACC. REC. PANEL SPAZIO LUZ WHITE
CEILING SQUARE

ALT0011



ACC. INPUT FLEX. SPAZIO LUZ
WHITE SURFACE TUBE 20MM
CONDUIT KIT

ALP0011



ACC. PANEL SURF. SPAZIO LUZ
WHITE WALL

ALS0011



ACC. PANEL SURF. SPAZIO LUZ
WHITE CEILING

ALB0011



ACC. PANEL REC. SPAZIO LUZ WHITE
CEILING ROUND

ALP0012



ACC. ASIMET. LENS SPAZIO LUZ
WHITE