


### Graphic reference



### Dimensions

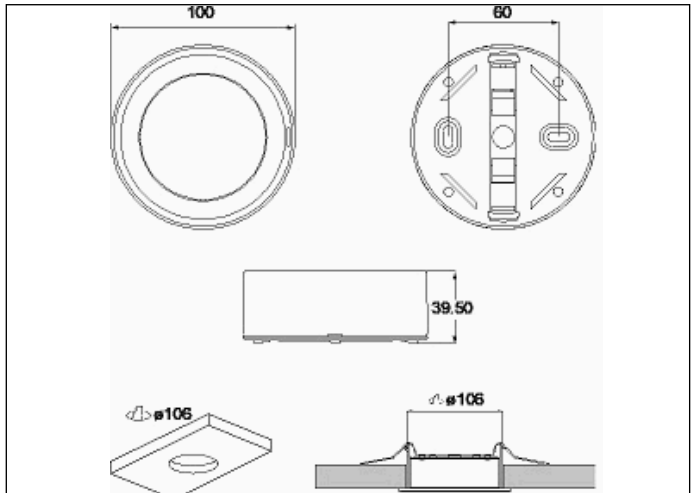

**Control System:** DALI

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034, EN  
61347-2-7, EN 61347-2-13, EN  
62386

**Certification:** CE, ENEC,  
CIVIL DEFENSE



### Electrical characteristics

**Supply:** 230V 50Hz<2.5W  
**Maintained mode consumption:** 2.5 W  
**Non-maintained mode consumption:** 0.9 W  
**Working temperature:** 0-40°C  
**Emergency lamp:** 12xLED 0.5W  
**Emergency lumen output:** 150 lm  
**Maintained lumen output:** 95 lm  
**Battery:** 3.2V-1.5Ah LFP

**Class:** II  
**Mode:** M/NM  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 3 h  
**Remote control:** Yes  
**Charging time:** 12 h


### Mechanical characteristics

**Envelope:** Polycarbonate  
**Diffuser:** Transparent Polycarbonate  
**Suitable for flammable surfaces:** Yes

**ATEX Envelope:**

**IP/IK:** IP42/IK04  
**Finish:** White RAL9003  
**Weight:** 0,16KG

### Photometric curve

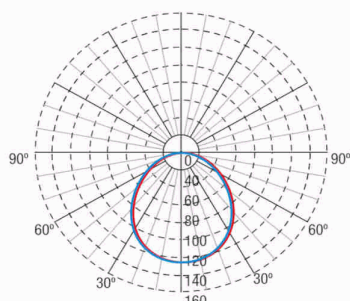

### Interdistance

**Installation  
height**

2,0 m	7,44 m	7,43 m
2,5 m	8,15 m	8,15 m
3,0 m	8,72 m	8,72 m
3,5 m	9,18 m	9,18 m

### Installation characteristics

Non-maintained luminaires use 4 terminals (2xL + 2xN) for supply connection.  
Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.  
Installation with mounting plate.  
Possibility of installation in:  
    Ceiling/Wall surface.  
    Recessed ceiling (with installation accessory)  
Possibility of connection with:  
    Recessed wiring.  
    Surface tube wiring (max. M20)

### Operating characteristics

Bus available for DALI communication.  
The luminaire has a status LED, which indicates:  
    Green LED: OK  
    Yellow LED flashing: Battery charging or battery connection failure.  
    LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data

### Accessories

#### ALQ0011



ACC. REC. SPAZIO LUZ WHITE  
CEILING SQUARE

#### ALC0011



ACC. REC. SPAZIO LUZ WHITE  
CEILING ROUND

#### ALE0065



ACC. HOUSING IP65 SPAZIO LUZ  
WHITE

#### ALX0011



ACC. REC. PANEL SPAZIO LUZ WHITE  
CEILING SQUARE

#### ALT0011



ACC. INPUT FLEX. SPAZIO LUZ  
WHITE SURFACE TUBE

#### ALP0011



ACC. PANEL SURF. SPAZIO LUZ  
WHITE WALL

#### ALS0011



ACC. PANEL SURF. SPAZIO LUZ  
WHITE CEILING

#### ALB0011



ACC. PANEL REC. SPAZIO LUZ WHITE  
CEILING ROUND