


### Graphic reference



### Dimensions

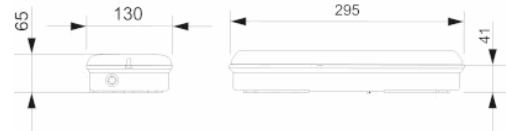

**Control System:** Standard

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22

**Certification:** CE, ENEC



### Electrical characteristics

**Supply:** 230V 50Hz<2.2W

**Maintained mode consumption:** - W

**Non-maintained mode consumption:** 2,2 W

**Working temperature:** 0-40°C

**Emergency lamp:** 12 x LED 0.5W

**Emergency lumen output:** 450 lm

**Maintained lumen output:** - lm

**Battery:** 3.6V-1.6Ah Ni-Cd

**Class:** II

**Mode:** NM

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 1 h

**Remote control:** No

**Charging time:** 24 h

### Mechanical characteristics

**Housing:** Polycarbonate

**Diffuser:** Transparent Polycarbonate

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP66/IK10

**Finish:** Transparent

**Weight:** 0,58KG

### Photometric curve

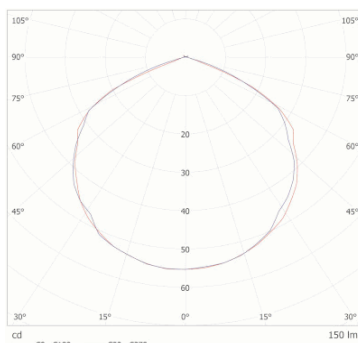

### Interdistance

**Installation height**



2,0 m

9,90 m

9,57 m

2,5 m

11,38 m

11,30 m

3,0 m

12,61 m

12,77 m

3,5 m

13,72 m

13,84 m

### Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Possibility of installation in:

Ceiling/Wall surface.

Possibility of connection with:

Surface tube wiring.

It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

### Operating characteristics

The luminaire has a status LED, which indicates:

Status of the battery charging circuit.

Green on = Battery charge OK.

Off = Wrong battery charge.

Remote control input that allows:

Put on standby without power supply.

Restart in emergency status without power supply.

Emergency status test with power supply

### General Envelope data

### Accessories

#### APF600



ACC. PICTO. DIANA/XENA IP66  
UNIVERSAL PERSON + ARROW