


Graphic reference



Dimensions

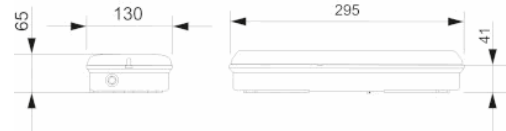

Control System: Standard

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<2.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 2,2 W

Working temperature: 0-40°C

Emergency lamp: 12 x LED 0.5W

Emergency lumen output: 600 lm

Maintained lumen output: - lm

Battery: 6.0V-1.6Ah Ni-Cd

Class: II

Mode: NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP66/IK10

Finish: Transparent

Weight: 0,78KG

Photometric curve

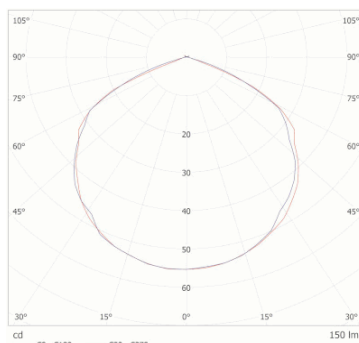

Interdistance

Installation height



2,0 m	9,90 m	9,57 m
2,5 m	12,08 m	11,78 m
3,0 m	13,43 m	13,41 m
3,5 m	14,65 m	14,83 m

Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Possibility of installation in:

Ceiling/Wall surface.

Possibility of connection with:

Surface tube wiring.

It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

Operating characteristics

The luminaire has a status LED, which indicates:

Status of the battery charging circuit.

Green on = Battery charge OK.

Off = Wrong battery charge.

Remote control input that allows:

Put on standby without power supply.

Restart in emergency status without power supply.

Emergency status test with power supply

General Envelope data

Accessories

APF600

ACC. PICTO. DIANA/XENA IP66 UNIVERSAL PERSON + ARROW