


Graphic reference



Dimensions

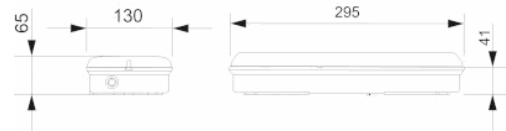

Control System: DALI2

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034, EN
61347-2-7, EN 61347-2-13, EN
62386

Certification: CE, ENEC,
DALI2



Electrical characteristics

Supply: 230V 50Hz<3.8W

Maintained mode consumption: 3,8 W

Non-maintained mode consumption: 0,9 W

Working temperature: 0-40°C

Emergency lamp: 12 x LED 0.5W

Emergency lumen output: 390 lm

Maintained lumen output: 235 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP66/IK10

Finish: Transparent

Weight: 0,67KG

Photometric curve

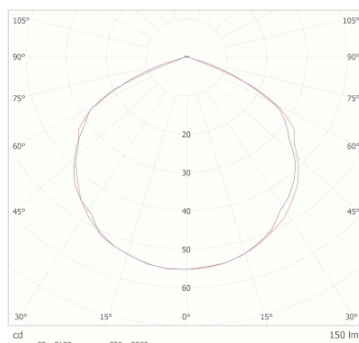

Interdistance

Installation height



2,0 m

9,83 m

9,54 m

2,5 m

11,21 m

11,19 m

3,0 m

12,42 m

12,57 m

3,5 m

13,50 m

13,61 m

Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Possibility of installation in:

Ceiling/Wall surface.

Possibility of connection with:

Surface tube wiring.

It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

Operating characteristics

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:


Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data

Accessories

APF600

ACC. PICTO. DIANA/XENA IP66 UNIVERSAL PERSON + ARROW