


### Graphic reference



### Dimensions

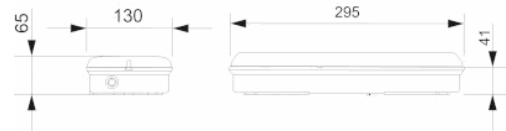

**Control System:** AutoTest

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Certification:** CE, ENEC



### Electrical characteristics

**Supply:** 230V 50Hz<1.5W

**Maintained mode consumption:** - W

**Non-maintained mode consumption:** 1.5 W

**Working temperature:** 0-40°C

**Emergency lamp:** 12 x LED 1W

**Emergency lumen output:** 800 lm

**Maintained lumen output:** - lm

**Battery:** 6.4V-1.5Ah LFP

**Class:** II

**Mode:** NM

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 1 h

**Remote control:** Yes

**Charging time:** 12 h

### Mechanical characteristics

**Envelope:** Polycarbonate

**Diffuser:** Transparent Polycarbonate

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP66/IK10

**Finish:** Transparent

**Weight:** 0,70KG

### Photometric curve

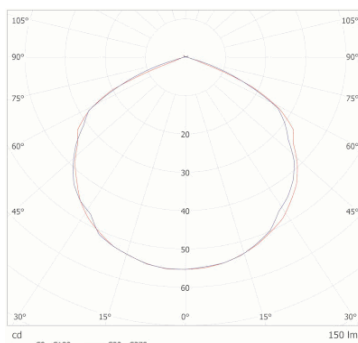

### Interdistance

**Installation height**



2,0 m	9,90 m	9,57 m
2,5 m	12,37 m	11,97 m
3,0 m	14,27 m	13,99 m
3,5 m	15,60 m	15,60 m

### Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Possibility of installation in:

Ceiling/Wall surface.

Possibility of connection with:

Surface tube wiring.

It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

### Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

### General Envelope data

### Accessories

#### AGV120



ACC. PROTEC. GRILLE FLAT/VENUS

#### APF600



ACC. PICTO. DIANA/XENA IP66  
UNIVERSAL PERSON + ARROW