


Graphic reference



Dimensions

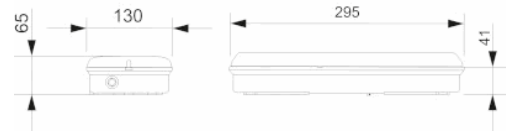

Control System: AutoTest

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<2.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 2.2 W

Working temperature: 0-40°C

Emergency lamp: 12 x LED 1W

Emergency lumen output: 800 lm

Maintained lumen output: - lm

Battery: 6.0V-1.6Ah Ni-Cd

Class: II

Mode: NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Transparent Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP66/IK10

Finish: Transparent

Weight: 0,62KG

Photometric curve

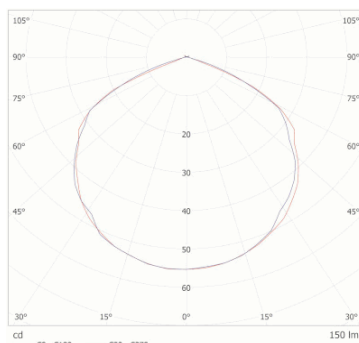

Interdistance

Installation height



2,0 m	9,90 m	9,57 m
2,5 m	12,37 m	11,97 m
3,0 m	14,27 m	13,99 m
3,5 m	15,60 m	15,60 m

Installation characteristics

Maintained luminaires have a selector bridge to enable / disable the maintained mode.

Possibility of installation in:

Ceiling/Wall surface.

Possibility of connection with:

Surface tube wiring.

It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

General Envelope data

Accessories

AGV120



ACC. PROTEC. GRILLE FLAT/VENUS

APF600



ACC. PICTO. DIANA/XENA IP66
UNIVERSAL PERSON + ARROW