


Graphic reference



Dimensions

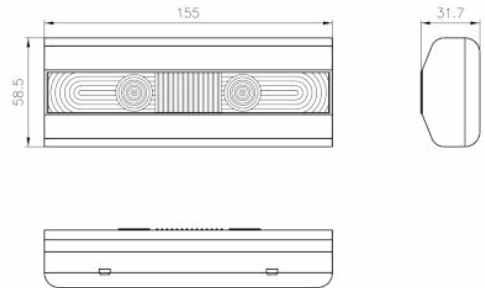

Control System: Standard

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<1.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 1.2 W

Working temperature: 0-40°C

Emergency lamp: 6xLED 0.5W

Emergency lumen output: 225 lm

Maintained lumen output: - lm

Battery: 3.6V-0.8Ah Ni-Cd

Class: II

Mode: NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Ambient + Directional Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,16KG

Photometric curve

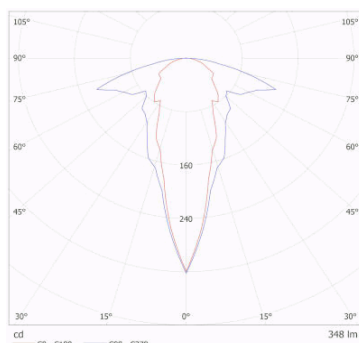

Interdistance

**Installation
height**



2,0 m	7,58 m	11,87 m
2,5 m	9,02 m	14,14 m
3,0 m	9,49 m	14,49 m
3,5 m	9,63 m	14,21 m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).
Luminaires have a selector bridge to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
 Recessed ceiling (with installation accessory)
Possibility of connection with:
 Recessed wiring.

Operating characteristics

The luminaire has a status LED, which indicates:
 Status of the battery charging circuit.
 On = Battery charge OK.
 Off = Wrong battery charge.
Remote control input that allows:
 Put on standby without power supply.
 Restart in emergency status without power supply.
 Emergency status test with power supply

General Envelope data

Accessories

AMY0011



ACC. REC. ALYA WHITE CEILING